

Insulator:PA6T UL94V-0 Color:Black
Contact:Phosphor Bronze
Plated:See Ordering Information


Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

S12722M-XXX43-ANX

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — A:Registration Mast
6: — A:In bag
B:In Tube
C:In Tray
E:Mylar In Tape&Reel
F:W/Cap In Tape&Reel

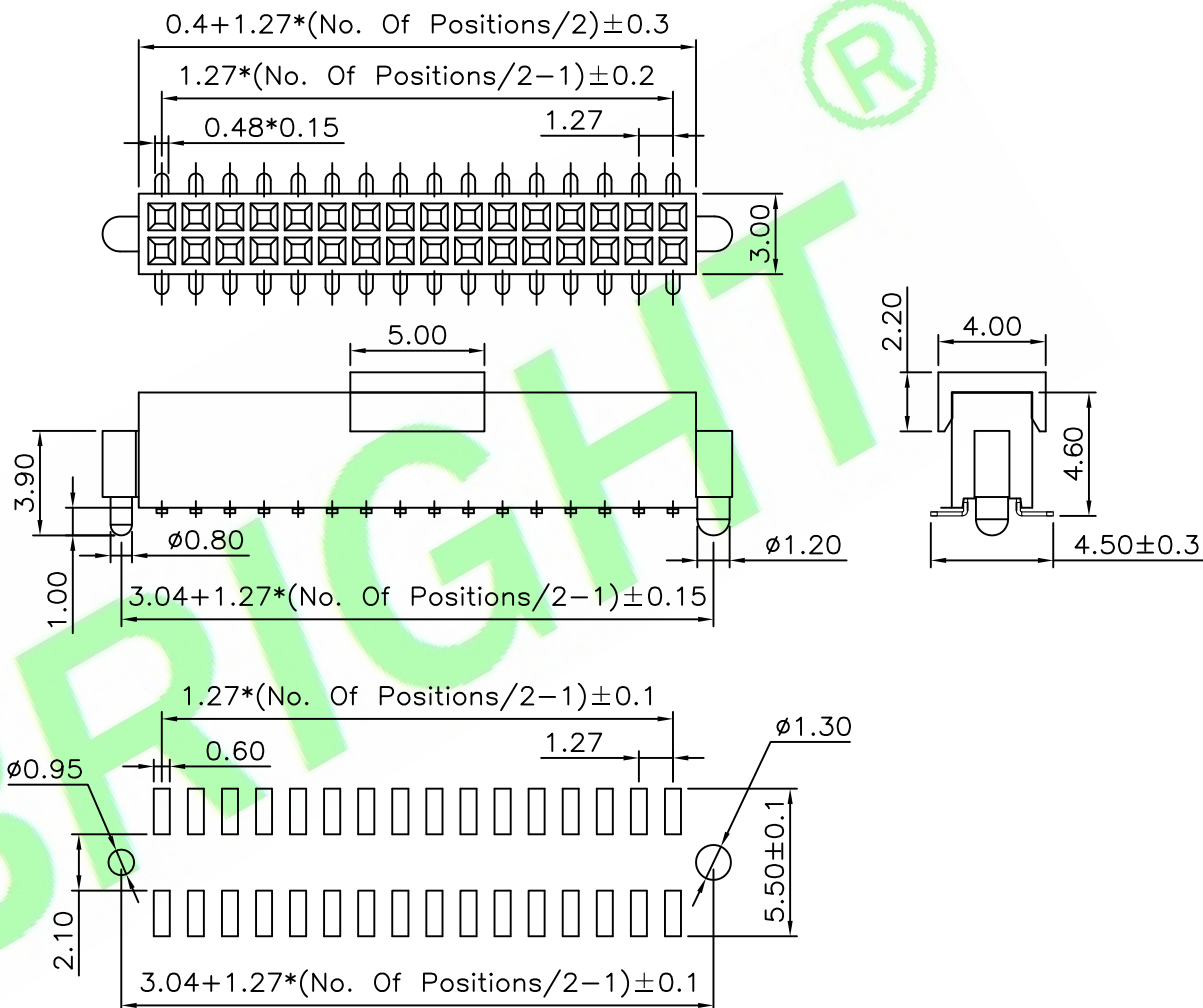

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S12722M-XXX43-ANX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type		SHEET: 1/1			A4
2X					x.x: ±0.25	x.x°: ±3.0°			SCALE:1:1			
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 20-Apr-2015		UNIT:mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx:	x.xxx°: ±1.0°						