

Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0(Halogen Free) Color:Black
Contact:Phosphor Bronze

Rating:

Current Rating:1.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:





Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information

S12722R-XXX44-X-NH

1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
5: — A:In bag
B:In Tube

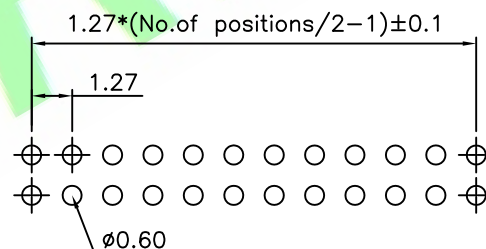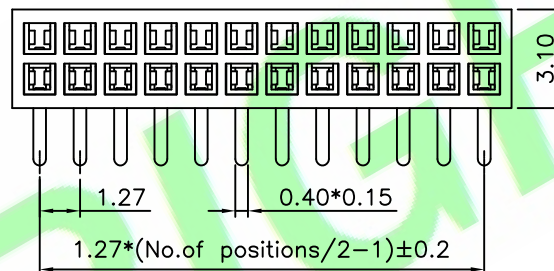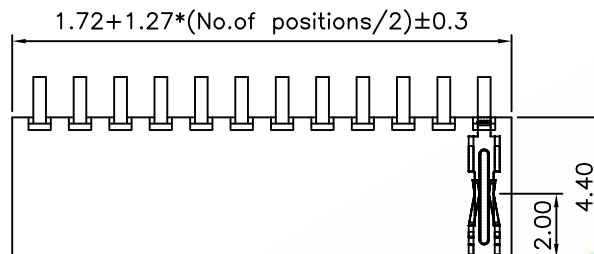

Recommended P.C. Board Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12722R-XXX44-X-NH		深圳市泰隆电子有限公司		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header R/A Type				
2X					x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.10	x.xx': ±2.0°	DATE: 6-Oct-2014				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°					
									SHEET: 1/1		A4
									SCALE: 1:1		
									UNIT: mm		

A4