

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp

Operating Temperature Range:-40°~+105°C

Electrical:

Insulator resistance:3000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information42022S-XXX175-X

1 2 3 4 5

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — Q: Tin Plated.





S: Matte Tin Plated

A: Gold Plated

H: Selective Gold Plated

5: — B: In Tube

F: In Reel

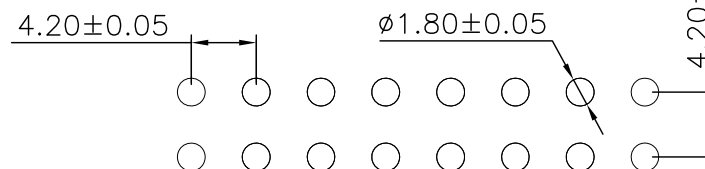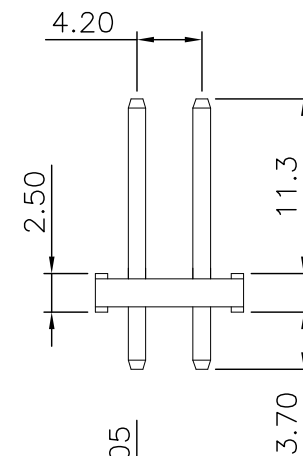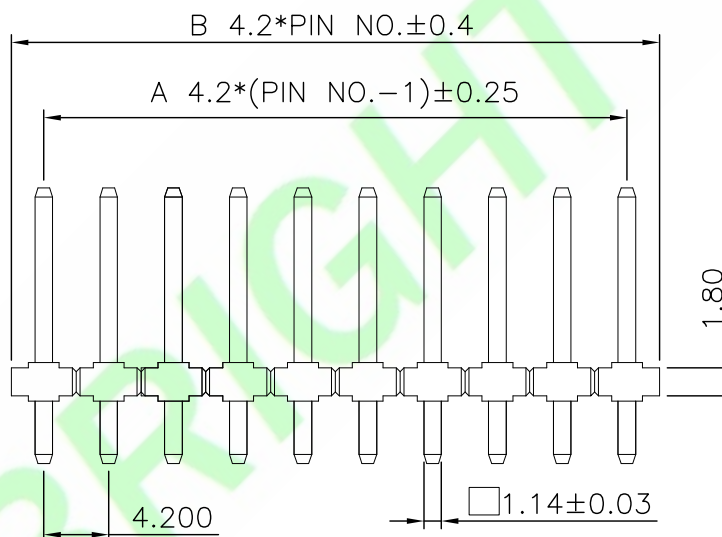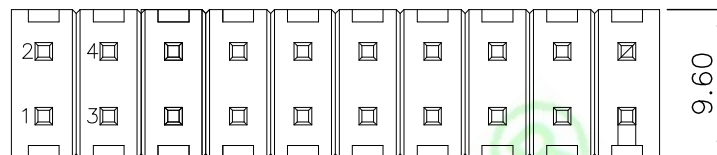

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 42022S-XXX175-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Sophia	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 4.20mm Pitch Straight Type Connector	SHEET: 1/1		A4
2X				Ren	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Sophia		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Oct-2020	THIRD ANGLE PROJECTION		