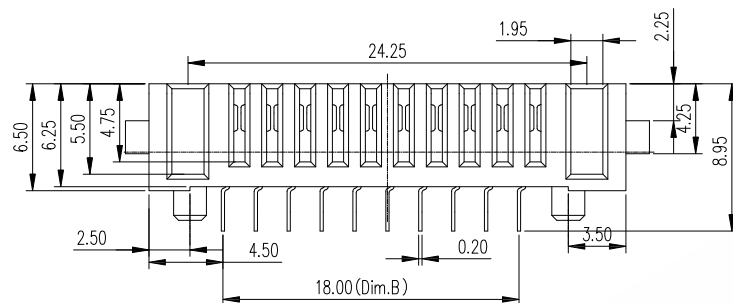

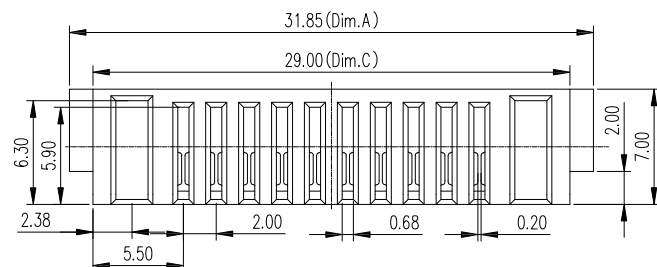


Recommended P.C.B Layout

Material

Insulator : Nylon 9T (UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification

Current Rating : 5A

Instant Current : 7A

Contact Resistance : 30mΩ

Insulation Resistance : 100MΩ

Dielectric Voltage : 500V

Operating Temperature : -40°~105°

No.of Pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	17.85	4.00	15.00	9.00
04	19.85	6.00	17.00	11.00
05	21.85	8.00	19.00	13.00
06	23.85	10.00	21.00	15.00
07	25.85	12.00	23.00	17.00
08	27.85	14.00	25.00	19.00
09	29.85	16.00	27.00	21.00
10	31.85	18.00	29.00	23.00
11	33.85	20.00	31.00	25.00
12	35.85	22.00	33.00	27.00

5X			
4X			
3X			
2X			
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.20	X': ±3.0°
X.X: ±0.10	X.X': ±3.0°
X.XX: ±0.05	X.XX': ±3.0°

PART NO : BC200-A01F-H1-C-XX
DWG. NO.:
TITLE : 2.00mm PITCH BOARD TO BOARD CONNECTOR
DATE: 10-Oct-2018

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4