


RoHS Compliant

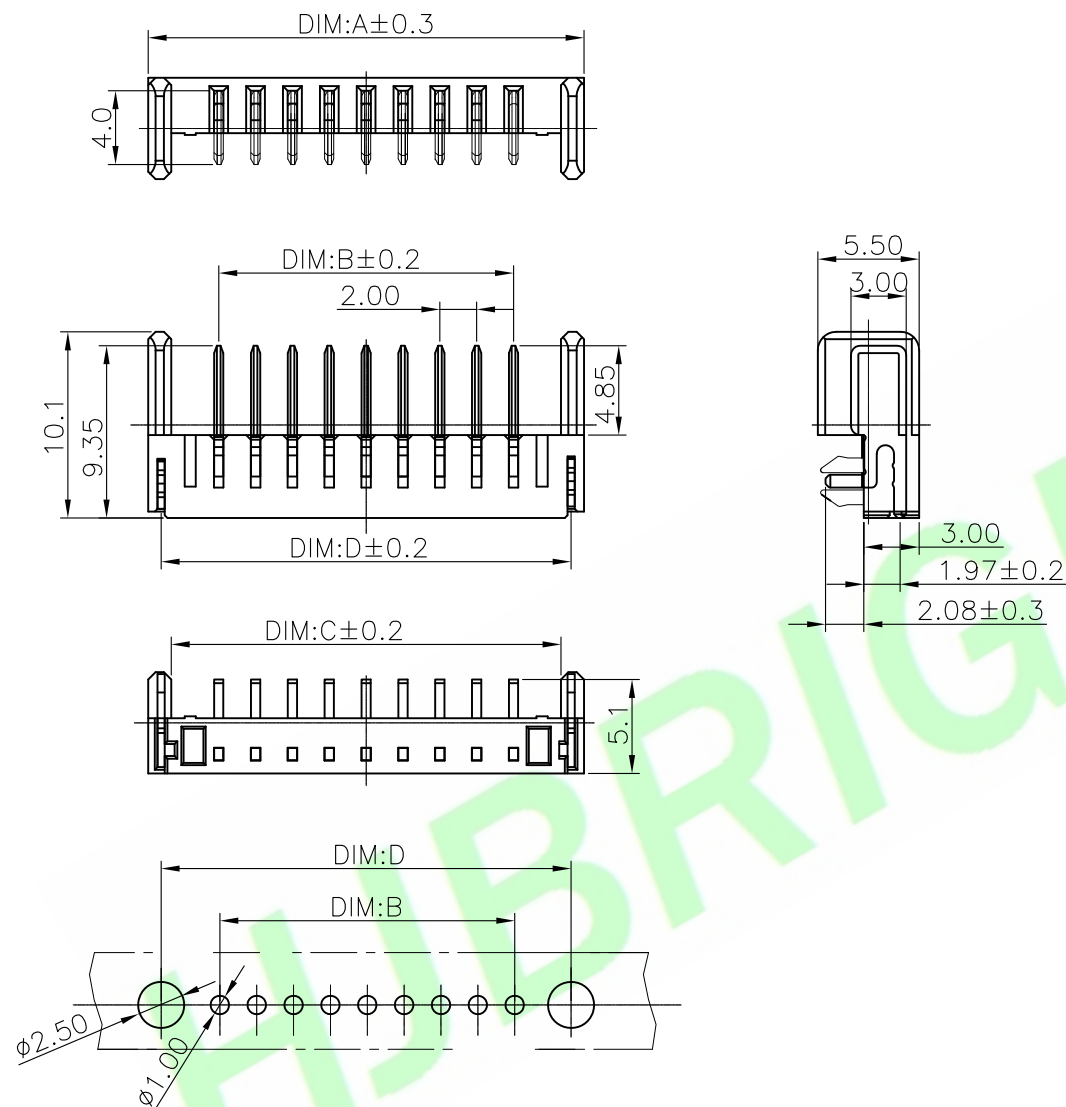

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel
or Tin

Specification

Current rating:7A

instant CURRENT:10A

Contact Resistance:30MΩ


Insulation Resistance:100MΩ

Dielectric Voltage:500V

Operdting Temperature:-40°~105°

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	11.65	4.00	9.15	10.25
04	13.65	6.00	11.15	12.25
05	15.65	8.00	13.15	14.25
06	17.65	10.00	15.15	16.25
07	19.65	12.00	17.15	18.25
08	21.65	14.00	19.15	20.25
09	23.65	16.00	21.15	22.25
10	25.65	18.00	23.15	24.25
11	27.65	20.00	25.15	26.25
12	29.65	22.00	27.15	28.25

Recommended P.C.B Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : BC200-A01M-M1-C-XX		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Bruce	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.:	X': ±3.0°	TITLE :		SHEET: 1/1			A4
2X				Tony	X.X: ±0.20	X.X': ±3.0°	Battery 90° 2.00MM Pitch male connector		SCALE: 1:1			
1X	ORIGINAL	Bruce		APPD.:	X.XX: ±0.10	X.XX': ±3.0°			UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.05	X.XXX': ±3.0°	DATE: 10-Oct-2018				THIRD ANGLE PROJECTION	