

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering InformationS12752M-22A20-NF-G

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
5: — F:W/Cap In Tape&Reel

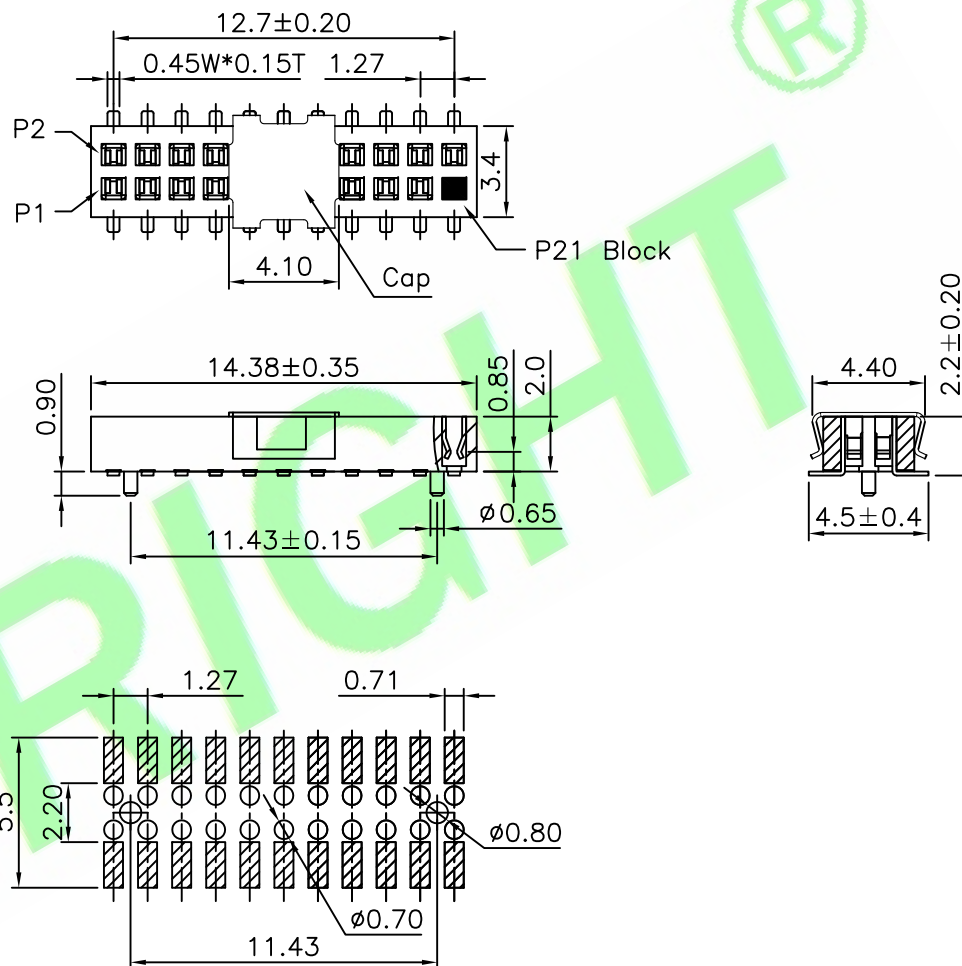

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : S12752M-22A20-NF-G		HJBRIGHT[®] 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X					CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:			
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type			
2X					x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Kenry			x.xx: ±0.15	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 22-Nov-2014				