

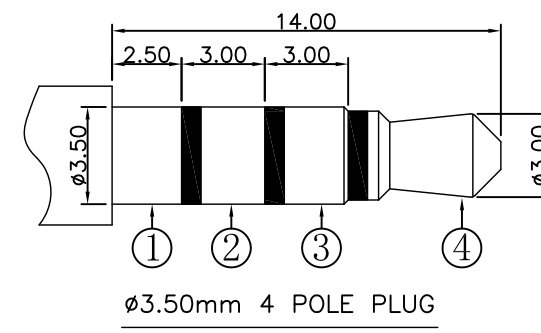
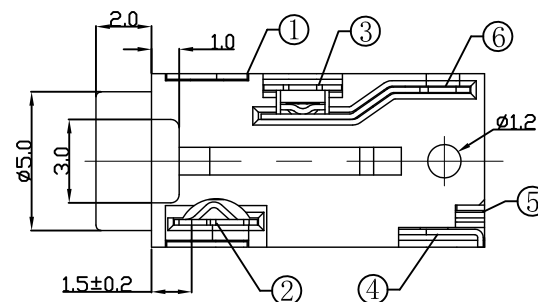
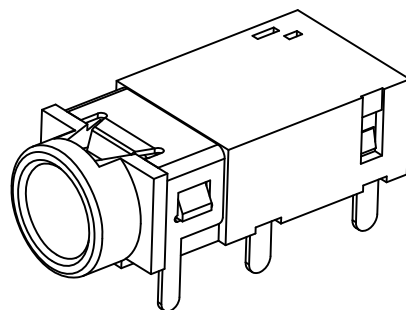
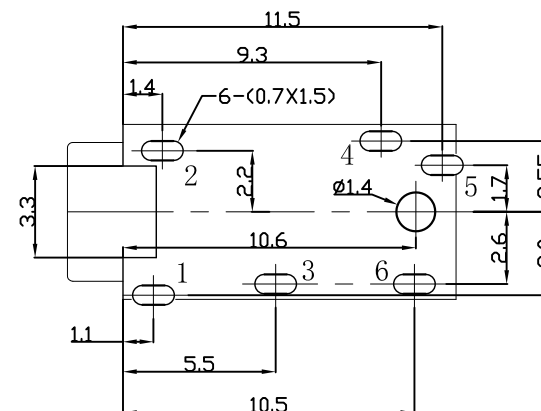


P. C. B LAYOUT
TOP VIEW

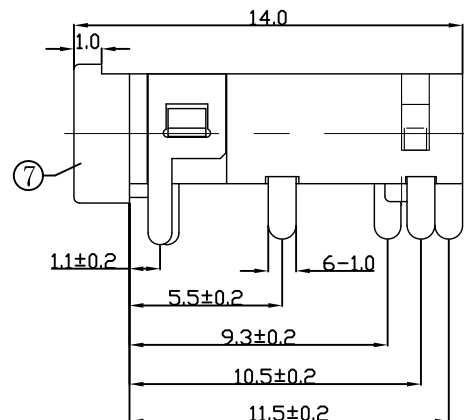

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion force: 3-30N;
Extraction force: 3-20N;
6. life test: 5,000 cycles。



7	HOUSING	1	PA9T (HF)	
6	6# CONTACT FOOT	1	BRONZE	Au-Plating
5	5# CONTACT FOOT	1	BRONZE	Au-Plating
4	4# CONTACT FOOT	1	BRONZE	Au-Plating
3	3# CONTACT FOOT	1	BRONZE	Au-Plating
2	2# CONTACT FOOT	1	BRONZE	Au-Plating
1	1# CONTACT FOOT	1	BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

HJBRIGHT 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

UNIT: mm



THIRD ANGLE PROJECTION

A4

5X			DR.BY.: Sophia	GENERAL TOLERANCE:		PART NO : PJ-D3143A		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGEE-E ELECTRONIC TECHNOLOGY LIMITED			
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:				
3X			APPD.: Billy		X.: ±0.50	X°: ±3.0°	TITLE : PHONE JACK		SHEET: 1/1		
2X				X.X: ±0.30	X.X°: ±2.0°	SCALE: 1:1					
1X	ORIGINAL	Sophia	X.XX: ±0.15	X.XX°: ±1.0°	DATE: 17-Dec-2018		UNIT: mm		THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.								