




DEFAULT TOLERANCE:?.05

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

A4

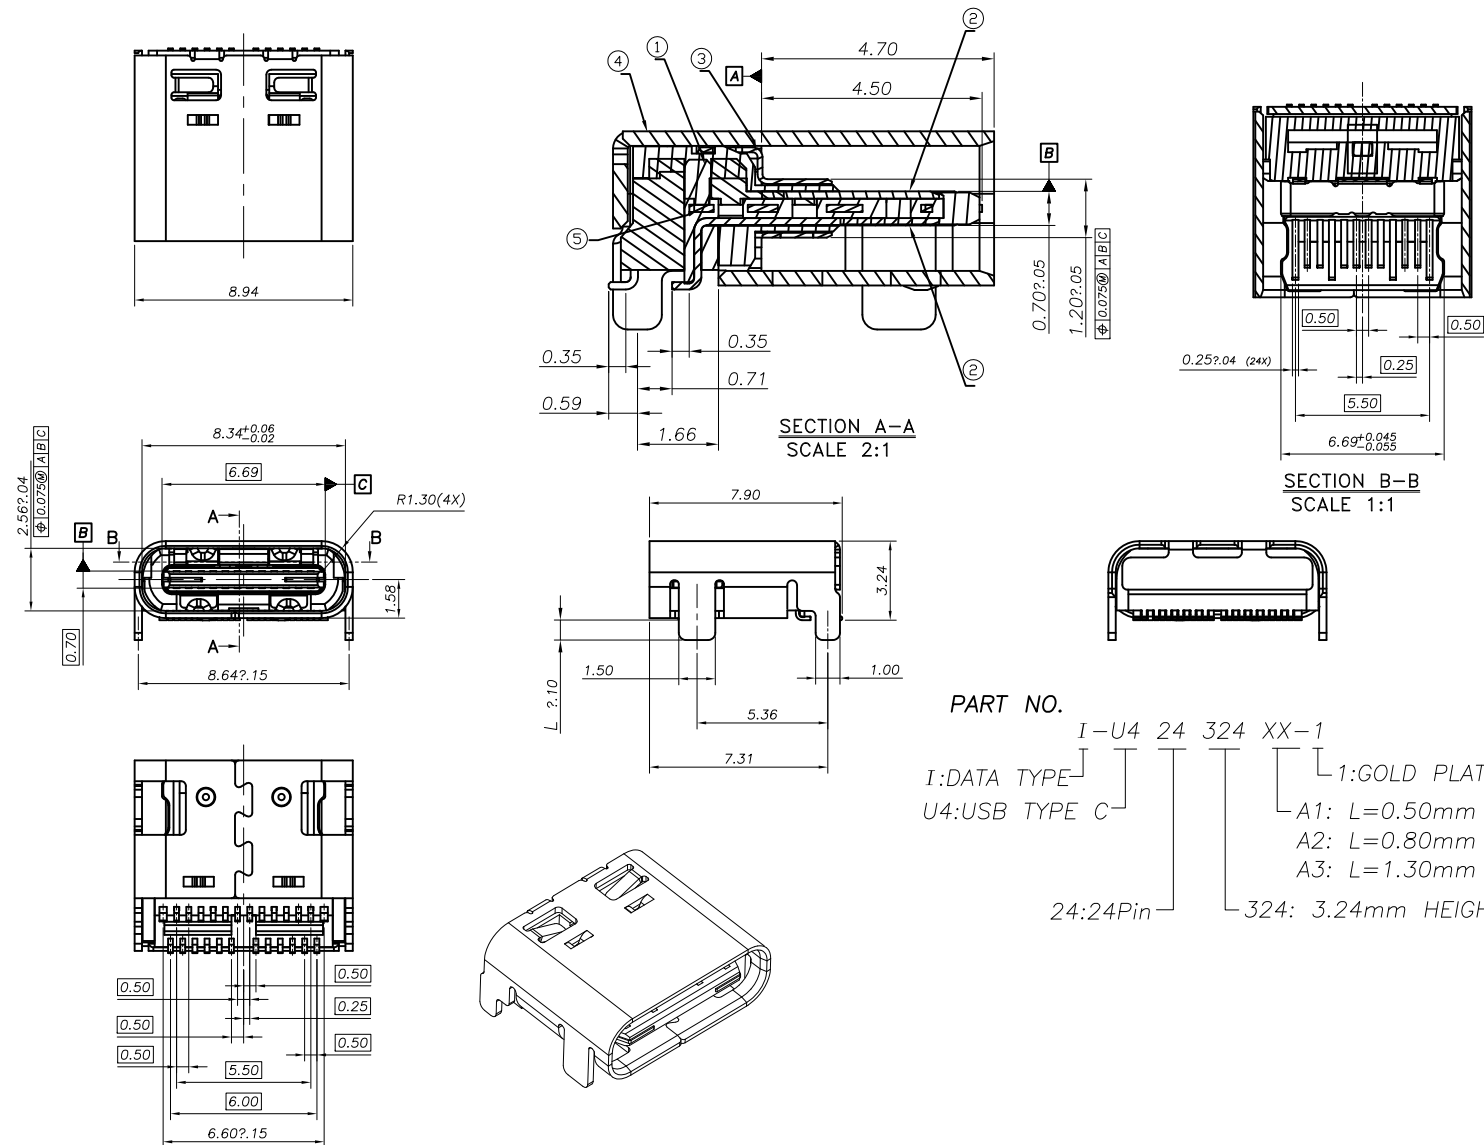

PART NO. I-U4 24 324 XX-1

I:DATA TYPE
U4:USB TYPE C

1:GOLD PLATED 1u"

A1: L=0.50mm
A2: L=0.80mm
A3: L=1.30mm

24:24Pin
324: 3.24mm HEIGHT

5X				DR.BY.: Tsw	GENERAL TOLERANCE:	PART NO : USB31-CFA3-SMD	HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Ren	LINEAR X.: ±0.30 X.X: ±0.20 X.XX: ±0.15 X.XXX: ±0.10	ANGLES X': ±5.0° X.X': ±3.0° X.XX': ±2.0° X.XXX': ±1.0°				
3X				APPD.: Billy		TITLE : USB C TYPE REC TOP MOUNT SMT TAIL	SHEET: 1/1		THIRD ANGLE PROJECTION	A4
2X						DATE: 31-Dec-2020	SCALE: 1:1			
1X	ORIGINAL	Tsw					UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO							

