

Specifications:

Material And Finish:

Insulator:PA9T UL94V-0 Color:Black

Contact:Phosphor Bronze

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:1000V AC/Minute

Ordering Information

254122M-XXX265-GX

1 2 3 4 5

- 1: — Series No.
2: — S:Straight Type
3: — No. of Positions
4: — A:Gold Flash
Q:160~240u" Sn over 30~80u" Ni
5: — B:In Tube
F:W/Cap In Tape&Reel

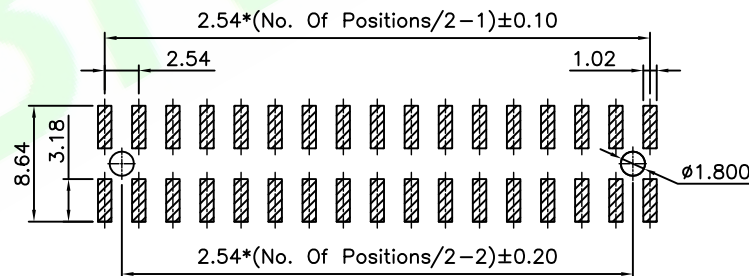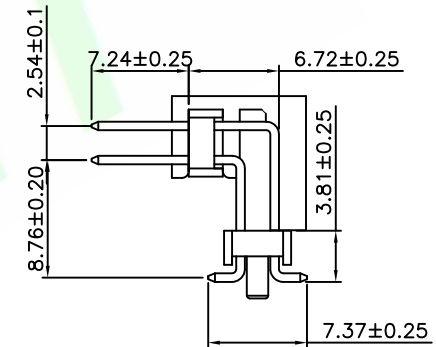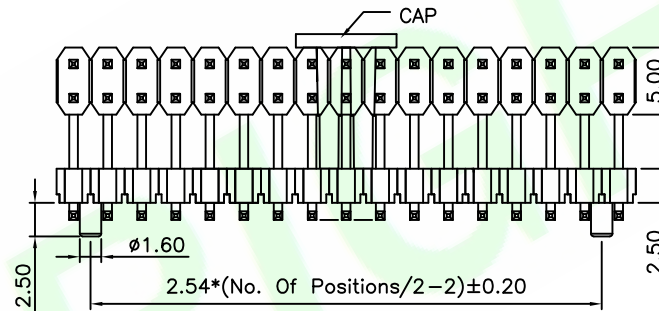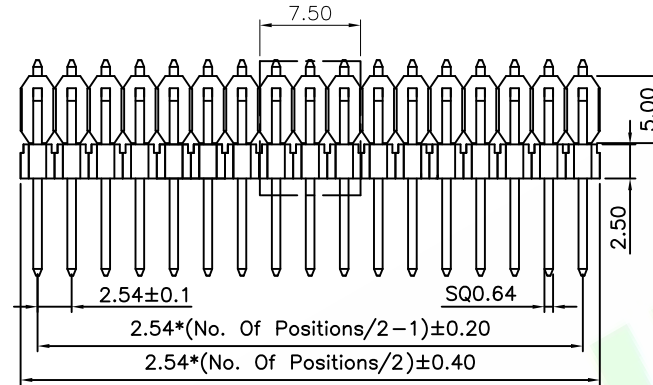

Recommended PCB Layout(Tolerance:0.05mm)

5X	Change Cap Structure	Tsw	20210312	DR.BY:	GENERAL TOLERANCE:		PART NO : 254122M-XXX265-GX		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X	Change Cap Structure	Kenry	20150826	Samson	LINEAR	ANGLES	DWG. NO.:				
3X	Change CAP	Samson	20150325	CHKD.:	x.:	x': ±5.0°	TITLE : 2.54mm Pitch Pin Header SMT Type		SHEET: 1/1		A4
2X	Add Code:W/Cap In Tape&Reel	Samson	20150226	Tony	x.x: ±0.40	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.25	x.xx': ±2.0°	DATE: 29-Dec-2014		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°					