


Contact:Phosphor Bronze



Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:1000V AC/Minute

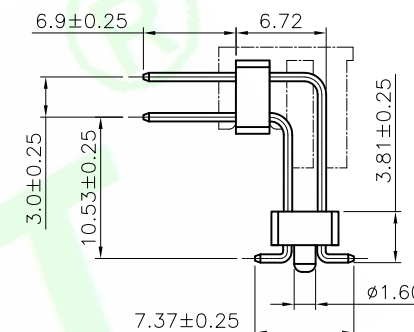

1	2	3	4	5	6	7	9	10	11	12
---	---	---	---	---	---	---	---	----	----	----

- 1:— Series No.
- 2:— Type number
- 3:— Row number
- 4:— M:SMT type
- 5:— No. of Positions
- 6:— TW:Matte Tin Plated
- 7:— Pin length
- 9:— 1:W/1Peg
- 10:— F:W/Cap in Tape&Reel
- 11:— N:PA6T
- 12:— Color:Black

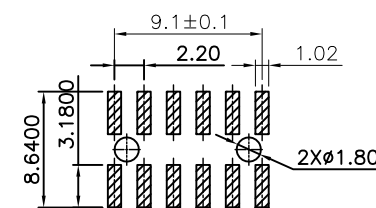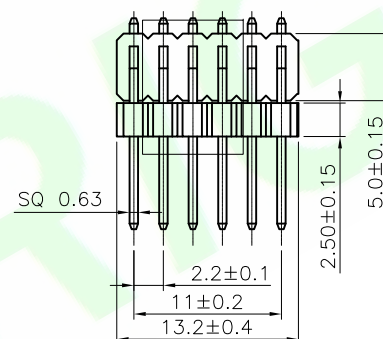

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 22012M-12TW229-1F-NB	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Tsw	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.:	x°: ±5.0°	TITLE : 2.2mm Pitch Pin Header SMT Type		SHEET: 1/1		A4
2X				Ren	x.x: ±0.40	x.x°: ±3.0°			SCALE: 1:1		
1X	Cap site	Tsw		APPD.:	x.xx: ±0.25	x.xx°: ±2.0°	DATE: 29-Sep-2020		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx°: ±1.0°					