

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natural
 Contact:Barss
 Plated:See Ordering Information

Rating:

Current Rating:7A(AWG#18)/10A(AWG#16)
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-25~+85°C

Electrical:




Contact resistance:10m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Ordering Information

A3961S-XXX-02-XX

1 2 3 4 5 6

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
Q: Tin Plated
- 5: — 0: W/0 Peg
1: W/1 Peg
- 6: — A: In Bag
B: In Tube
C: In Tray

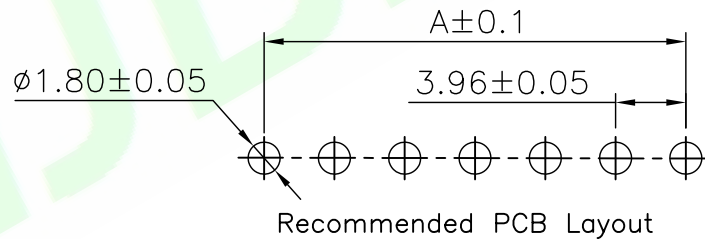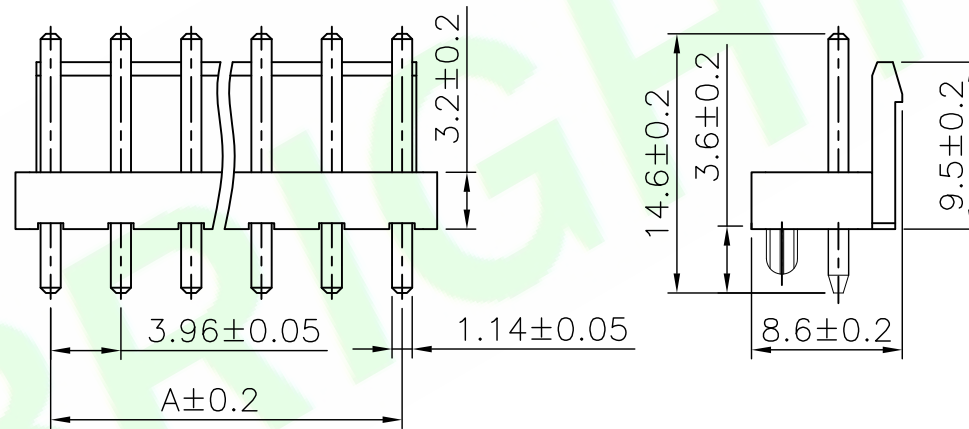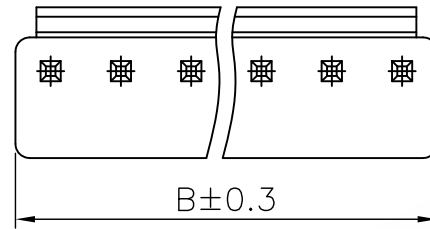

Circuits	Dimension mm	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : A3961S-XXX-02-XX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				Tsw	LINEAR	ANGLES	DWG. NO.: RD0806-070		
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE :		SHEET: 1/1
2X				Mark	x.x: ±0.20	x.x': ±3.0°	3.96mm Pitch Wafer Straight Type		SCALE: 1:1
1X	ORIGINAL			APPD.:	x.xx: ±0.15	x.xxx: ±2.0°	DATE: 20-May-2021		UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxxx: ±1.0°			THIRD ANGLE PROJECTION

A4