

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Phosphor Bronze
 Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp
 Voltage Rating:150V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:





Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

S20042M-XXX43-0X

1 2 3 4 5

- 1: — Series No.
- 2: — M:SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
 H:Selective Gold Plated
 Q:Tin Plated
- 5: — A:In bag
 B:In Tube
 C:In Tray
 E:W/Cap In Tube
 F:W/Cap In Tape&Reel

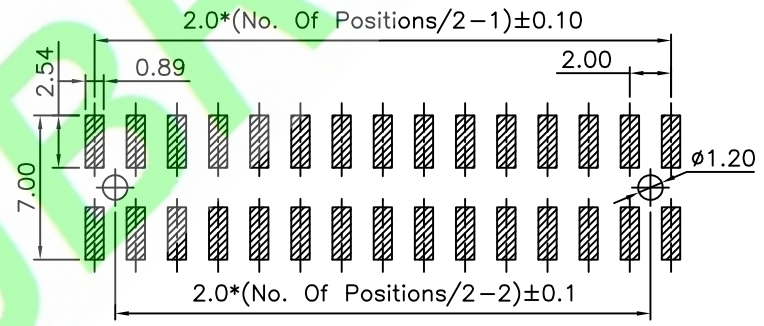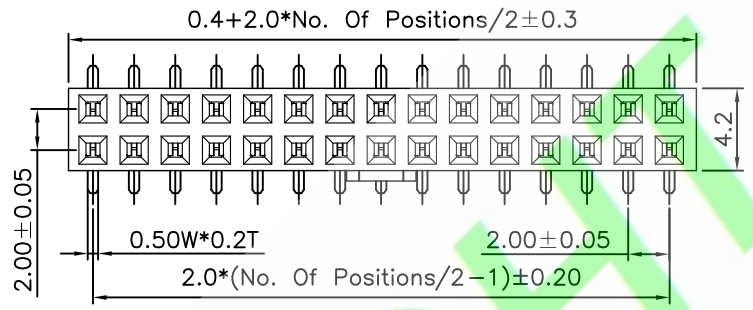

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.:	
4X					
3X				CHKD.:	朱波
2X					
1X	ORIGINAL	joy chen		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.		

GENERAL TOLERANCE:		PART NO : S20042M-XXX43-0X	
LINEAR	ANGLES	DWG. NO.: RD0807-014	
X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Socket Header SMT Type	
X.X: ±0.20	X.X': ±3.0°	DATE: 02-Jul-2008	
X.XX: ±0.15	X.XX': ±2.0°		
X.XXX: ±0.10	X.XXX': ±1.0°		

SHEET: 1/1		<p>THIRD ANGLE PROJECTION</p>	<p>A4</p>
SCALE: 1:1			
UNIT: mm			

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED