





Specifications:
 Material And Finish:
 Insulator:PA66 UL94V-0

Rating:
 Current Rating:1.0 Amp
 Voltage Rating:200V AC/DC
 Operating Temperature Range:-25~+85°C
 Contact Resistance:20mΩ Max
 Insulation Resistance 500MΩ Min
 Withstanding Voltage:500V AC/mlnute

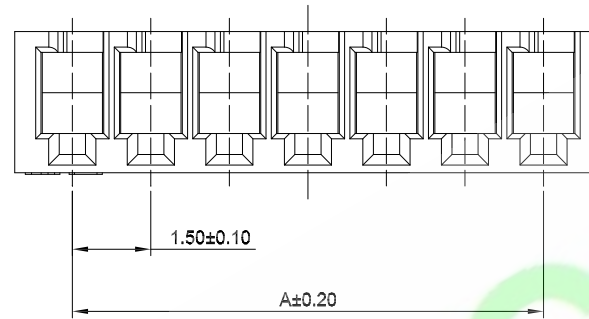

Ordering Information
A1501H-XXP-X

- 1: Series No.
 2: No. of Positions
 3: Color:
 W:White

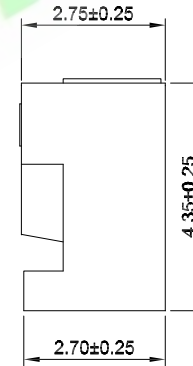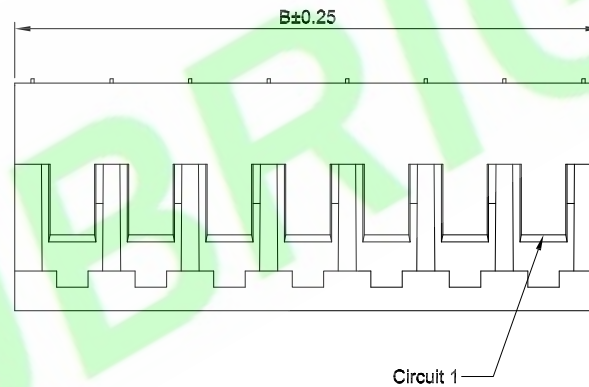

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	3.70	9P	12.00	14.20
3P	3.00	5.20	10P	13.50	15.70
4P	4.50	6.70	11P	15.00	17.20
5P	6.00	8.20	12P	16.50	18.70
6P	7.50	9.70	13P	18.00	20.20
7P	9.00	11.20	14P	19.50	21.70
8P	10.50	12.70	15P	21.00	23.20

5X			
4X			
3X			
2X			
1X	ORIGINAL	Tsw	
REV	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Tsw	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	X.: ±0.30	X': ±5.0°
	X.X: ±0.20	X.X': ±3.0°
	X.XX: ±0.10	X.XX': ±2.0°
	X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A1501H-XXP-X
DWG. NO.:
TITLE : 1.50mm Pitch Housing
DATE: 07-Jun-2021

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4