

Specifications:**Material And Finish:**

Insulator:PA 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

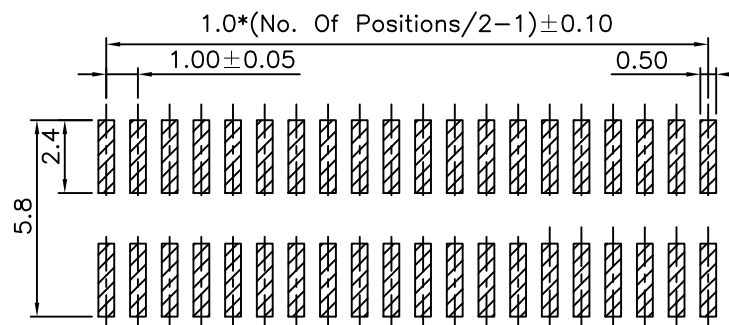
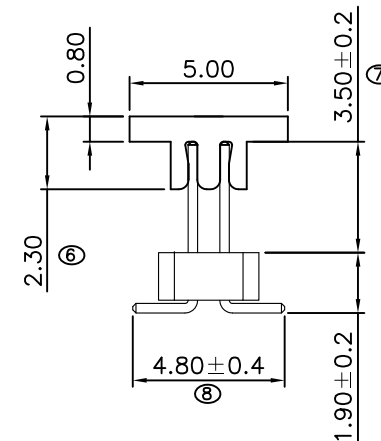
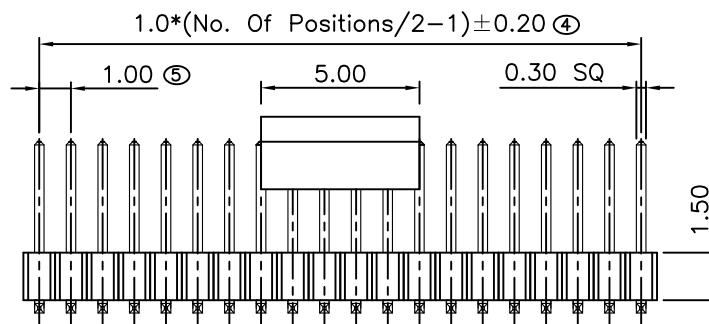
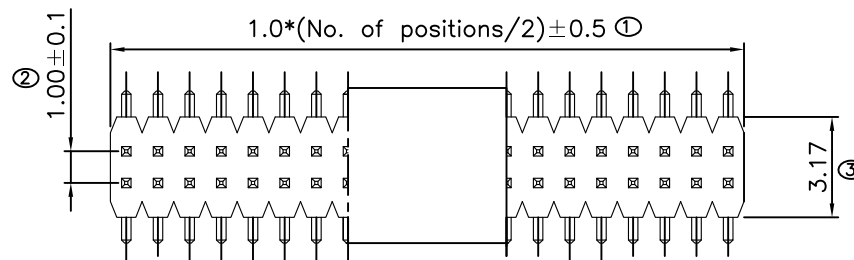
Insulator resistance:500M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information**10032M-XXX070-NX**

1	2	3	4	5
---	---	---	---	---

- 1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:—A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

**Recommended PCB Layout**

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 10032M-XXX070-NX		HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED						
4X				Tsw	LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 1.0mm Pitch Pin Header SMT Type								
2X				Mark	X.X: ±0.20	X.X': ±3.0°									
1X	ORIGINAL	Mark		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 28-Jun-2021		SHEET: 1/1		A4				
REV.	DESCRIPTION	DR.BY		ECN. NO.	Billy	X.XXX: ±0.10			X.XXX': ±1.0°			SCALE: 1:1			
							UNIT: mm	THIRD ANGLE PROJECTION							
1		2		3		4		5		6		7		8	