

Specifications:

Material And Finish:

Insulator:PA66 UL94V-2

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25° C~+85° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:800V AC/Minute

Ordering Information

H2005-XX-01-X

1 2 3

- 1: — Series No.
- 2: — No. of Positions
- 3: — A:In bag
B:In Tube
C:In Tray

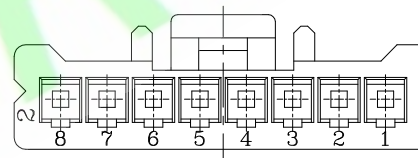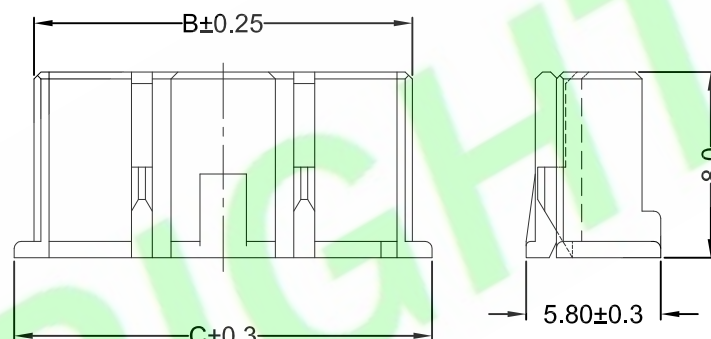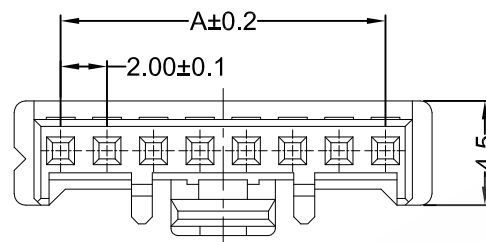

Poles	Dimensions (mm)		
	A	B	C
02	2.00	4.30	6.00
03	4.00	6.30	8.00
04	6.00	8.30	10.00
05	8.00	10.30	12.00
06	10.00	12.30	14.00
07	12.00	14.30	16.00
08	14.00	16.30	18.00
09	16.00	18.30	20.00
10	18.00	20.30	22.00
11	20.00	22.30	24.00
12	22.00	24.30	26.00
13	24.00	26.30	28.00
14	26.00	28.30	30.00
15	28.00	30.30	32.00
16	30.00	32.30	34.00

5X				DR.BY.: Sophia	GENERAL TOLERANCE:		PART NO : H2005-XX-01-X		HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm THIRD ANGLE PROJECTION A4
4X				CHKD.: Ren	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 2.00mm Crimp Style Connectors		
2X	ORIGINAL	Sophia			X.X: ±0.20	X.X': ±3.0°	DATE: 10-Sep-2020		
1X	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.10	X.XX': ±2.0°			
REV.					X.XXX: ±0.10	X.XXX': ±1.0°			