


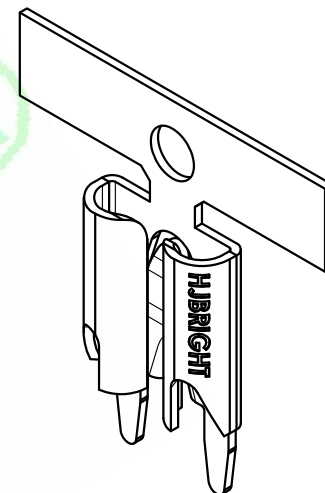
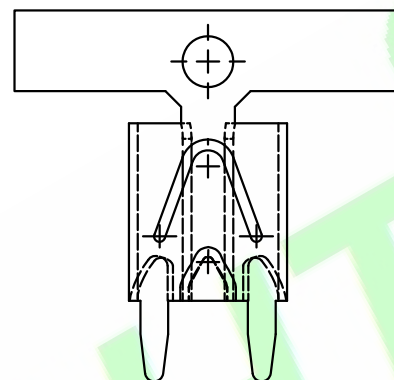
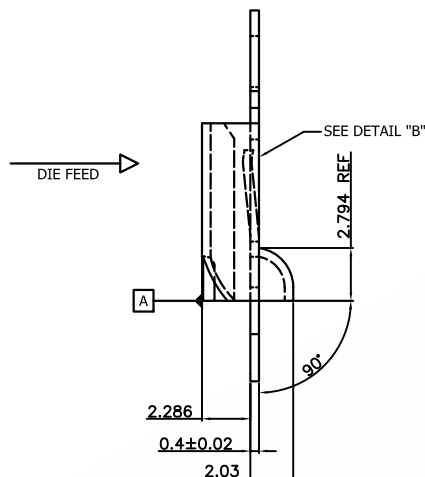
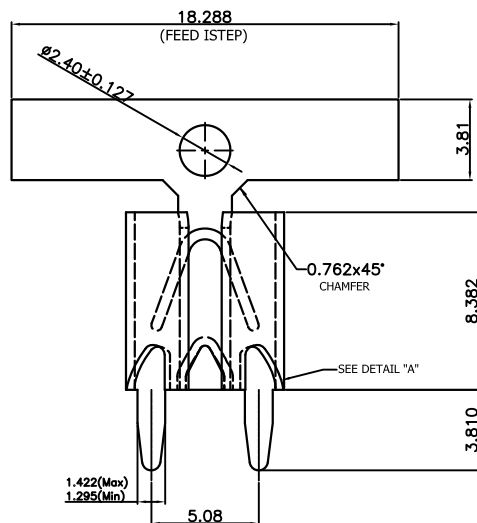
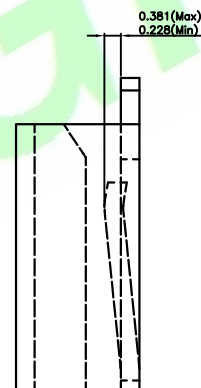




CURLS WITHIN .003
TO EACH OTHER AT GAP




DETAIL "B"

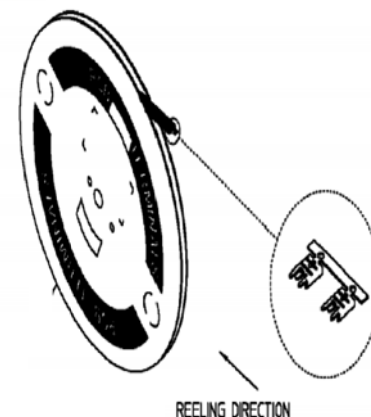

Notes:

- 1.材質: C26000
- 2.毛邊: 0.05mm(max.)
- 3.料帶傘形弧度要求: 1mm(max.) per 300mm
- 4.单个插拔力≥1.5kgf

Part No	Material	Finish	Qty/reel	Note
HJ-507Q-739-01-S	Brass			
HJ-507Q-739-01	Brass	Tin-plated		Tin-plated 120~150u" over Nickel-plated 35~50u"

5X				DR.BY.: Mark	TOLERANCES EXCEPT AS NOTED	PART NO : HJ-507Q-739-01	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					.XXX ± 0.127 .XX ± 0.254	DWG. NO.:			
3X				CHKD.: Ren	FRACTIONAL: ± 1/64	TITLE : 5.08mm Terminal	SHEET: 1/1		A4
2X					ANGULAR: ± 2 DEG.		SCALE: 1:1		
1X	ORIGINAL	Mark		APPD.: Billy	HOLE: + 0.0762 / - 0.0508	DATE: 03-Sep-2021	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO						