

RoHS Compliant

SPECIFICATIONS

Current Rating:5A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-25°C~85°C
 contact Resisitance:10MΩ Min
 Insulation Resisitance:1000MΩ Min
 Withstanding Voltyage:1500V AC/minute
 Material:PBT,UL94V-0
 Color:Black



Ordering Information

H3501-XX-01-B

1 2 3

- 1: — Series No.
- 2: — No. of Positions
- 3: — W:White
B:Black

Circuits	Dimension	
	A	B
2	—	3.9(.154)
4	3.00(.118)	6.9(.272)
6	6.00(.236)	9.9(.390)
8	9.00(.354)	12.9(.508)
10	12.00(.472)	15.9(.626)
12	15.00(.591)	18.9(.744)
14	18.00(.709)	21.9(.862)
16	21.00(.827)	24.9(.980)
18	24.00(.945)	27.9(1.098)
20	27.00(1.063)	30.9(1.217)
22	30.00(1.181)	33.9(1.335)
24	33.00(1.299)	36.9(1.453)

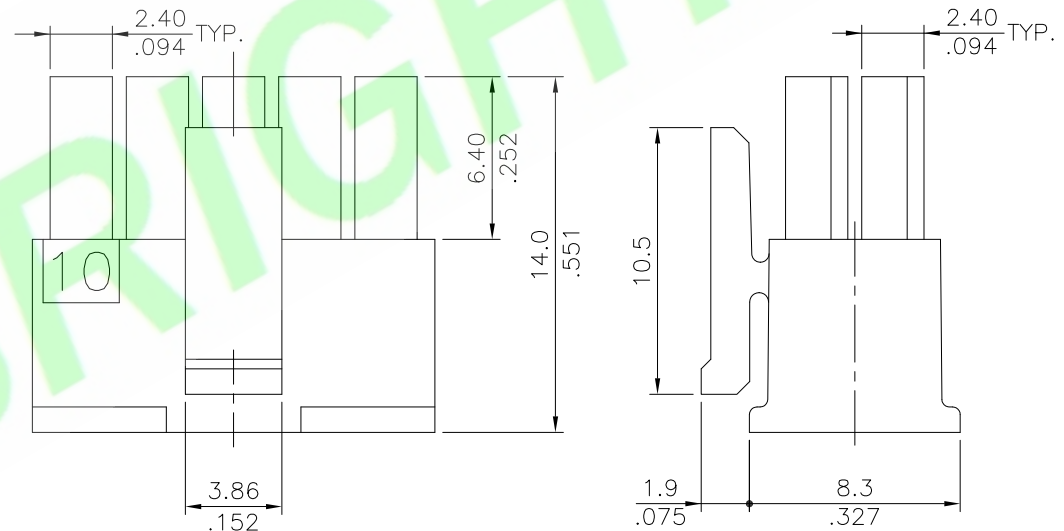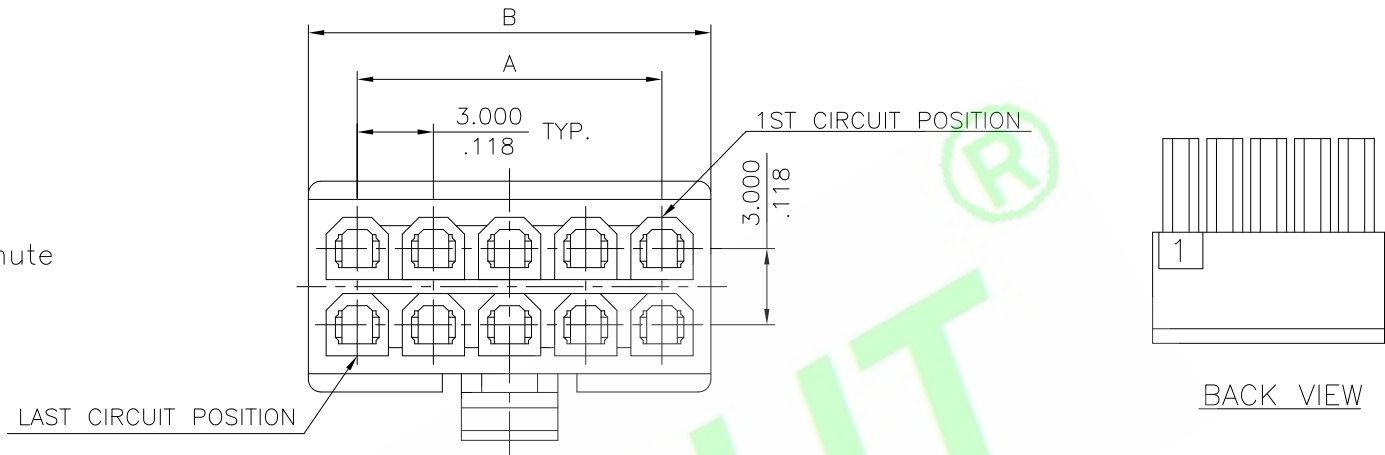

5X			DR.BY.: 曾冬明	GENERAL TOLERANCE:		PART NO : H3501-XX-01-B		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X			CHKD.: 朱波	LINEAR	ANGLES	DWG. NO.:			
3X			APPD.:	X.: ±0.30	X': ±1.0°	TITLE : 3.00mm PITCH POWER CONNECTOR FEMALE HOUSING		SHEET: 1/1	THIRD ANGLE PROJECTION
2X	ORIGINAL	joan cheng		X.X: ±0.20	X.X':	DATE: 18-Dec-2008		SCALE: 1:1	
1X				X.XXX: ±0.10	X.XXX':			UNIT: mm	
REV.	DESCRIPTION	DR.BY	EDN. NO.						A4