

RoHS Compliant

Automobile
Product**Specifications:****Material And Finish:**

Insulator:Nylon 9T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:200V AC/DC

Operating Temperature

Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information22011S-04S142-GG

1 2 3 4 5


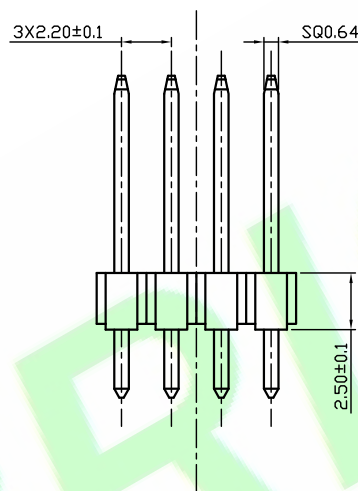

1:— Series No.

2:— S: Straight Type

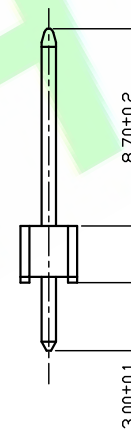
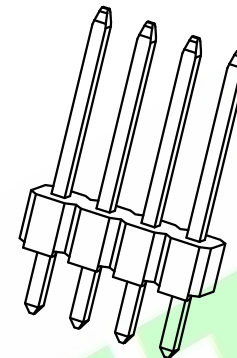
3:— No. of Positions


4:— S: Matte Tin Plated

5:— G: W/O Cap In Tape&Reel

**Recommended PCB LAYOUT (TOP VIEW)**

Tolerance:±0.05mm



5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 22011S-04S142-GG		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Zolin	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 4PIN Single Row 2.2 Pitch Straight Header		SHEET: 1/1		 THIRD ANGLE PROJECTION	A4
2X				Hu.CH	x.x: ±0.40	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Zolin		APPD.:	x.xx: ±0.25	x.xx': ±2.0°	DATE: 09-Dec-2025		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°						