







Plated: See Ordering Information

Range: $-40^{\circ} \sim +105^{\circ}\text{C}$

Withstanding Voltage:1000V AC/Minute


$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 5:— B:In Tube

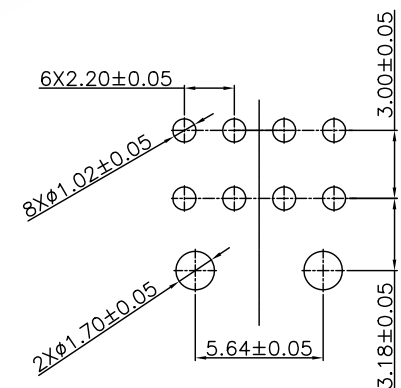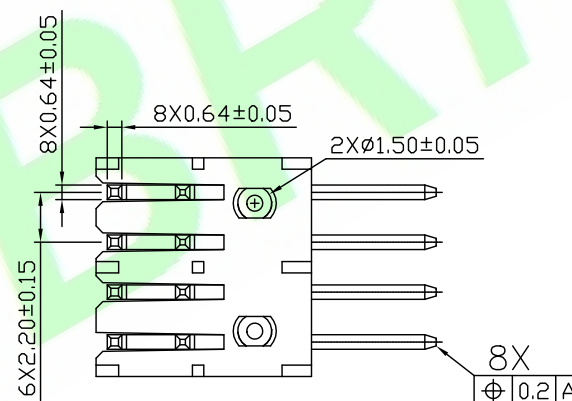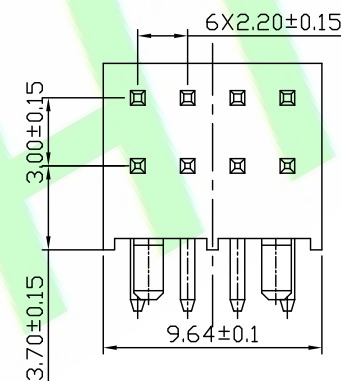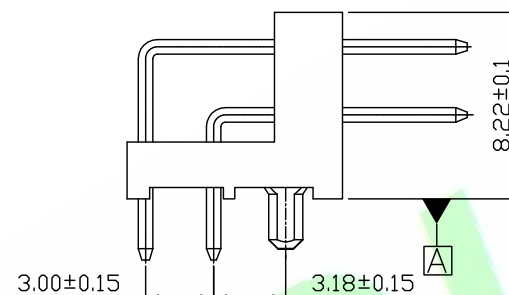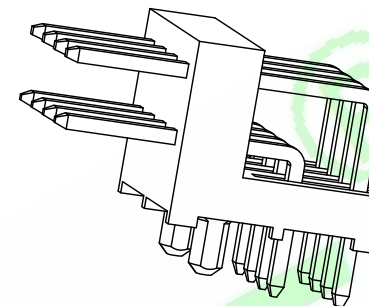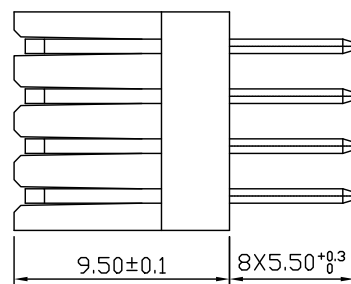

Recommended PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : 22012DR-08S173-B		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Hu.CH	x.:	x*: ±5.0°	TITLE : 8PIN Double Row 2.2 Pitch R/A Header		SHEET: 1/1		 THIRD ANGLE PROJECTION	A4
2X					x.x: ±0.40	x.x*: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Zolin		APPD.:	x.xx: ±0.25	x.xx*: ±2.0°	DATE: 22-Aug-2025		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx*: ±1.0°						