

Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature

Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

22032M-12S126-0G

1 2 3 4 5






1: — Series No.

2: — M:SMT Type

3: — No. of Positions

4: — S:Matte Tin Plated

5: — G:Tape&Reel

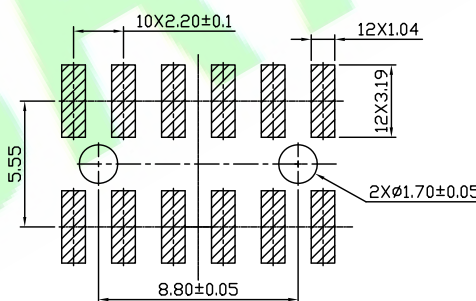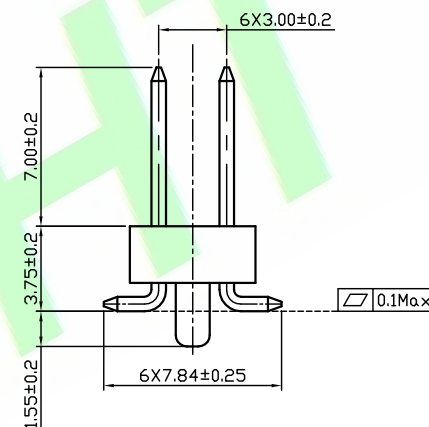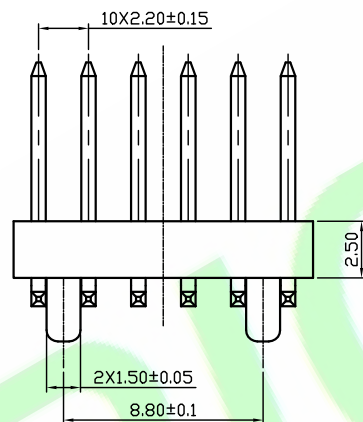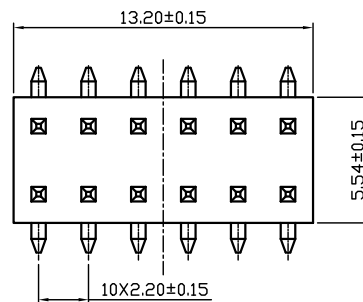


Recommended PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : 22032M-12S126-0G	
CHKD.: Hu.CH	LINEAR	ANGLES	DWG. NO.:	
APPD.: Billy	X.: ±0.40	X': ±5.0'	TITLE : 12PIN Double Row 2.2 Pitch SMT Header	
	X.X: ±0.25	X.X': ±3.0'		
	X.XXX: ±0.15	X.XXX': ±1.0'		
			DATE: 08-Mar-2024	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4