


Specifications:
Material And Finish:
Insulator:PA6T UL94V-0 Color:Black
Contact:Brass
Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40~+105°C


Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
22032R-12S226-X
1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — S:Matte Tin Plated
5: — A:In bag
B:In Tube
C:In Tray

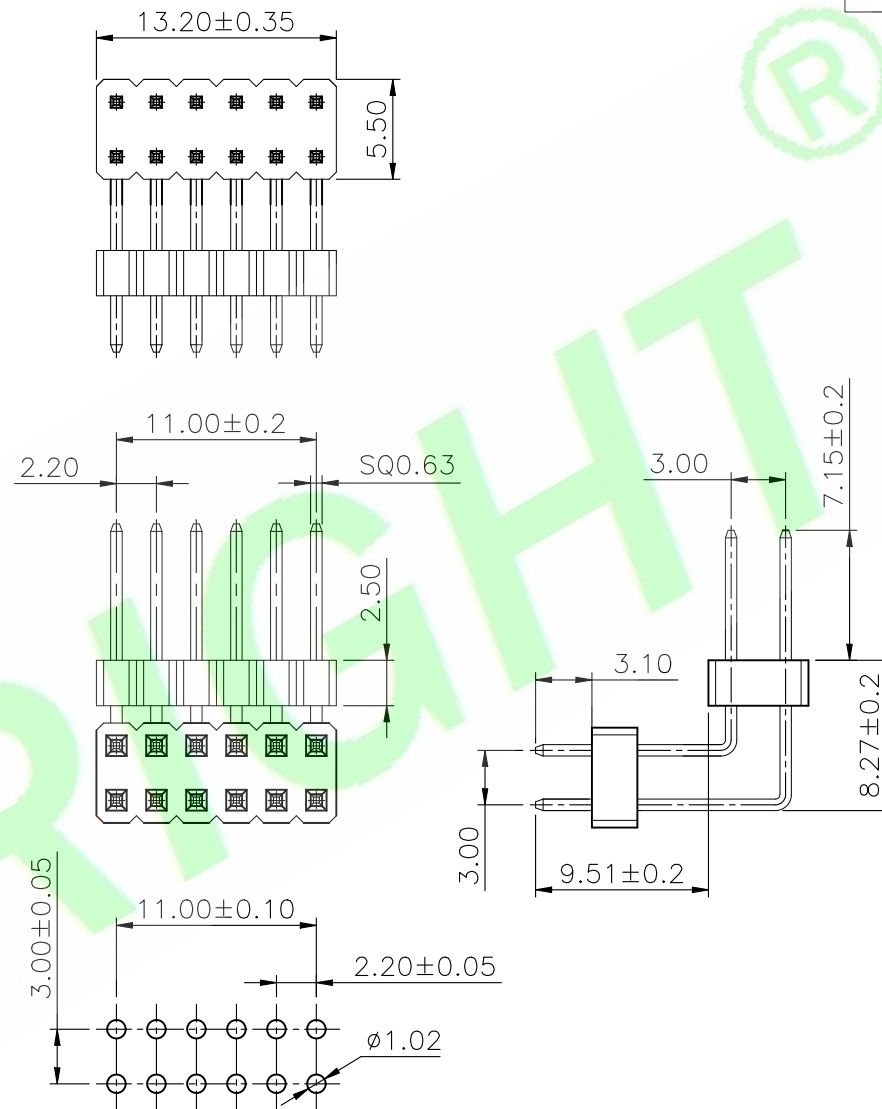

Recommended PCB Layout

				DR.BY.: Quentin		GENERAL TOLERANCE:		PART NO : 22032R-12S226-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
						LINEAR		ANGLES					DWG. NO.:				
				CHKD.: Mark		X.: ±0.30		X': ±5.0°		TITLE : 2.2*3.0mm Pitch Pin Header R/A Type							
						X.X: ±0.25		X.X': ±3.0°									
				APPD.: Billy		X.XX: ±0.15		X.XX': ±2.0°		DATE: 15-Oct-2026							
						X.XXX: ±0.10		X.XXX': ±1.0°									
1X		ORIGINAL		Quentin		ECN. NO.				SHEET: 1/1				A4			
REV.		DESCRIPTION		DR.BY						SCALE: 1:1							
								UNIT: mm		THIRD ANGLE PROJECTION							
1				2		3		4		5		6		7		8	