

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:white

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

25011R-XXXXXX-NX

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— A:Gold Flash
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray

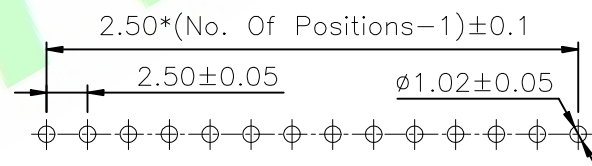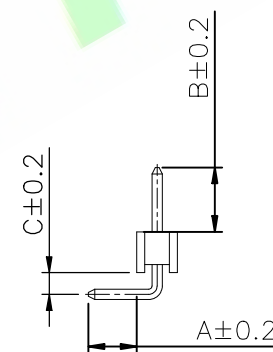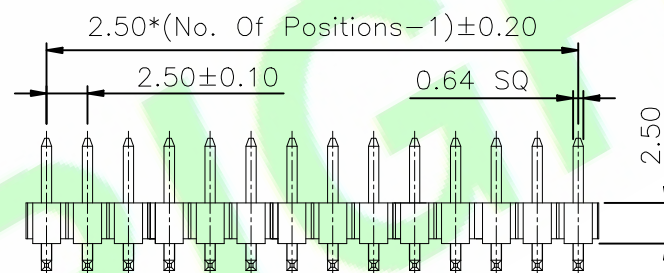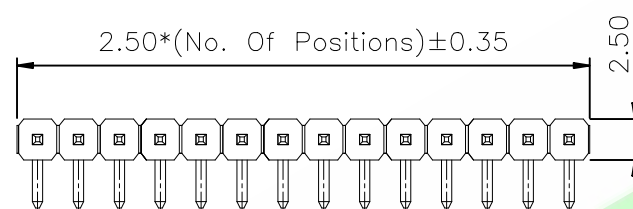


Recommended PCB Layout

1X	ORIGINAL	Samson
REV.	DESCRIPTION	DR.BY

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 25011R-XXXXXX-NX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 2.50mm Pitch Pin Header R/A Type
	X.XXX: ±0.10	X.XXX': ±1.0°	
ECN. NO.			DATE: 10-Dec-2013

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4