

Specifications:

Material And Finish:

Insulator:PA6T/PA66/PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information

25011S-XXXXXX-XX

1 2 3 4 5 6

- 1:— Series No.
- 2:— S: Straight Type
- 3:— No. of Positions
- 4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
- 5:— L: PA66
N: PA6T
P: PBT
- 6:— A: In bag
B: In Tube

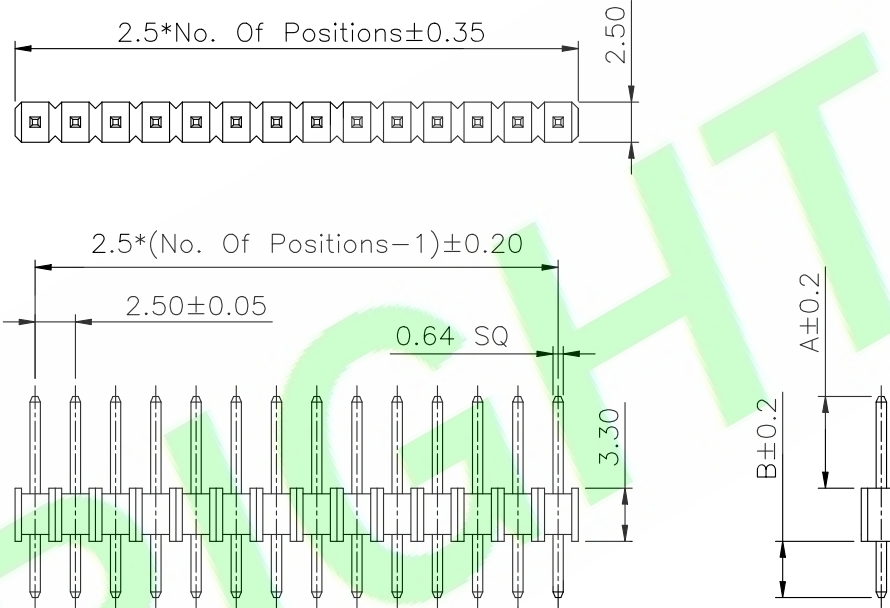

Recommended PCB Layout

DR.BY: joy chen	GENERAL TOLERANCE:		PART NO : 25011S-XXXXXX-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:		
APPD.: Billy	X.: ± 0.30	X': $\pm 5.0^\circ$	TITLE : 2.50mm Pitch Pin Header Straight Type		SHEET: 1/1
REV.	DESCRIPTION	DR.BY	ECN. NO.	DATE: 12-May-2008	SCALE: 1:1
					UNIT: mm
					THIRD ANGLE PROJECTION
					A4