

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information

250122R-10X200B-NX

- 1: Series No.
2: R:R/A Type
3: No. of Positions
4: A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
S:Matte Tin Plated
5: A:In Bag
B:In Tube
C:In Tray

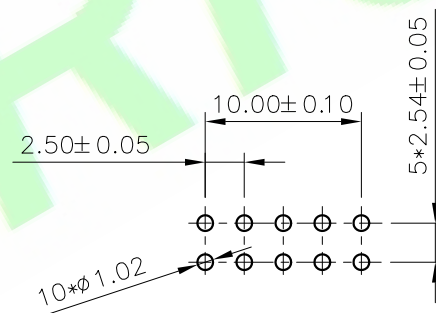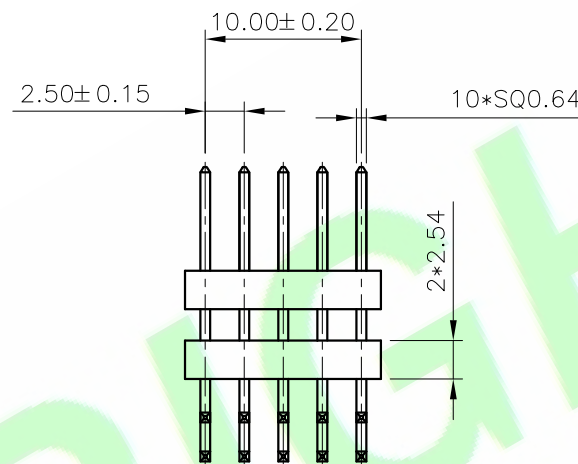

Recommended PCB Layout

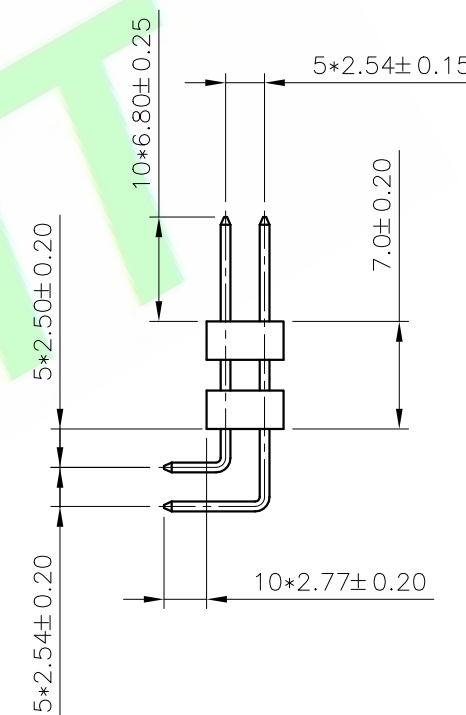

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : 250122R-10X200B-NX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ±0.30	x': ±5.0°	TITLE :	
	x.x: ±0.20	x.x': ±3.0°	2.54mm Pitch Pin Header R/A Type	
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 18-Jul-2013	
	x.xxx: ±0.10	x.xxx': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO