

Specifications:

Material And Finish:

Insulator:PA9T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Specification:

Current Rating:3A

Voltage Rating:250V

Temperature Rating: -40°C~105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information

25012MA-06S138-F

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — S:Matte Tin Plated
5: — F:W/Cap Tape&Reel

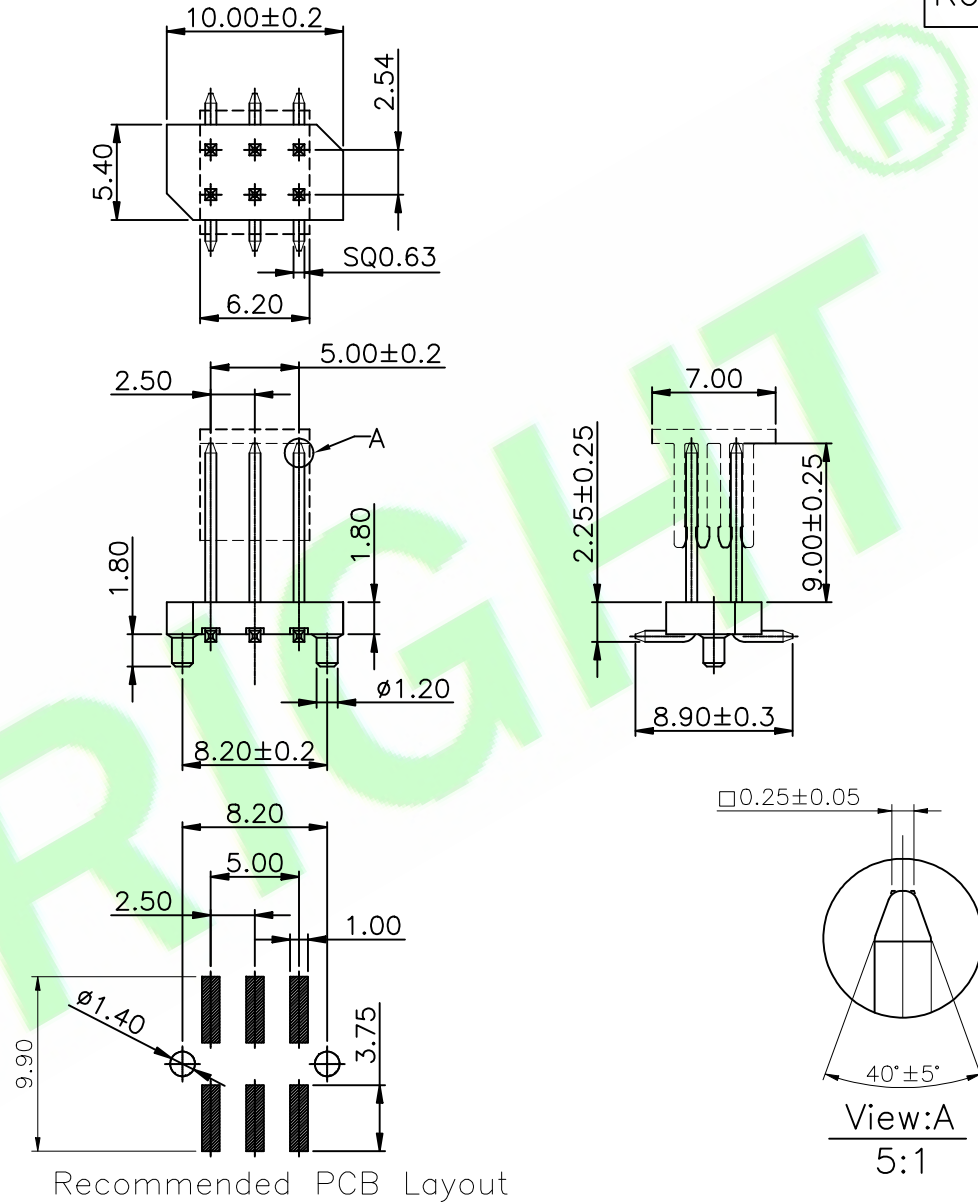

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 25012MA-06S138-F		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
	LINEAR	ANGLES	DWG. NO.:						
CHKD.: Hu.ch	x.: ±0.30	x': ±5.0°	TITLE : 2.5*2.54mm Pitch Pin Header SMT Type		SHEET: 1/1			A4	
	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1				
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 22-Mar-2025		UNIT: mm				THIRD ANGLE PROJECTION
	x.xxx: ±0.10	x.xxx': ±1.0°							

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY	