

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information





25411R-03A126A-NX

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash

D:10u"Gold on Contact;Gold Flash on tail
 F:20u"Gold on Contact;Gold Flash on tail
 H:Gold Flash on Contact;Matte Tin on tail
 T:10u"Gold on Contact;Matte Tin on tail
 Y:30u"Gold on Contact;Matte Tin on tail.
 S:Matte Tin Plated.

- 5: — A:In bag
- B:In Tube
- C:In Tray

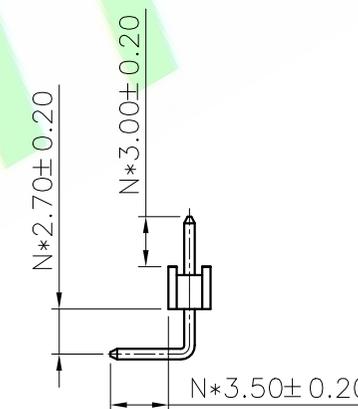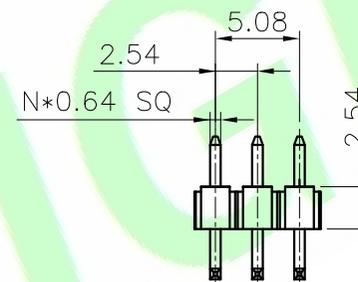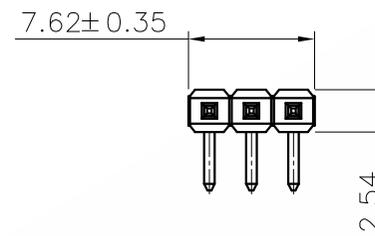

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : 25411R-03A126A-NX	HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:	
3X				APPD.: Billy	x.: ±0.30	x': ±5.0'	TITLE :	SHEET: 1/1
2X					x.x: ±0.20	x.x': ±3.0'	2.54mm Pitch Pin Header R/A Type	SCALE: 1:1
1X	ORIGINAL	Kenry			x.xx: ±0.15	x.xx': ±2.0'	DATE: 31-Jan-2017	UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0'		THIRD ANGLE PROJECTION

A4