





Specifications:
Material And Finish:
Insulator:PA9T UL94V-0 Color:Black
Contact:Phosphor Bronze
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp
Voltage Rating:250V
Operating Temperature Range:-40~+105°C


Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information
25411S-03S119C-GG
1 2 3 4 5

- 1: Series No.
- 2: S:Straight Type
- 3: No. of Positions
- 4: S:Matte Tin Plated
- 5: G:W/O Cap In Tape&Reel

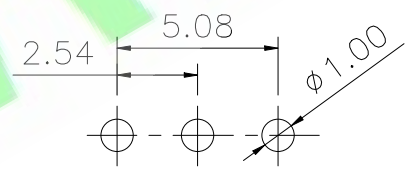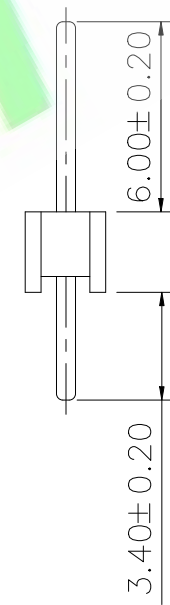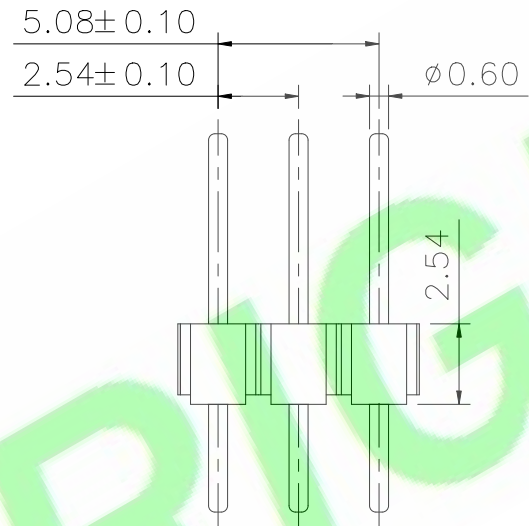

Recommended PCB Layout
(Tolerance:±0.05)

				DR.BY.: Xiao CHKD.: Judyyan APPD.: Billy	GENERAL TOLERANCE:		PART NO : 25411S-03S119C-GG		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
					LINEAR	ANGLES	DWG. NO.:					
					x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Pin Header Straight Type					
					x.x: ±0.20	x.x': ±3.0°						
					x.xx: ±0.15	x.xx': ±2.0°						
					x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 17-Jun-2024		SHEET: 1/1			A4
								SCALE: 1:1				
								UNIT: mm		THIRD ANGLE PROJECTION		
1X	ORIGINAL	Xiao										
REV	DESCRIPTION	DR.BY	ECN. NO.									
1		2		3	4	5	6		7		8	