


Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 5:— A:In bag
B:In Tube
C:In Tray

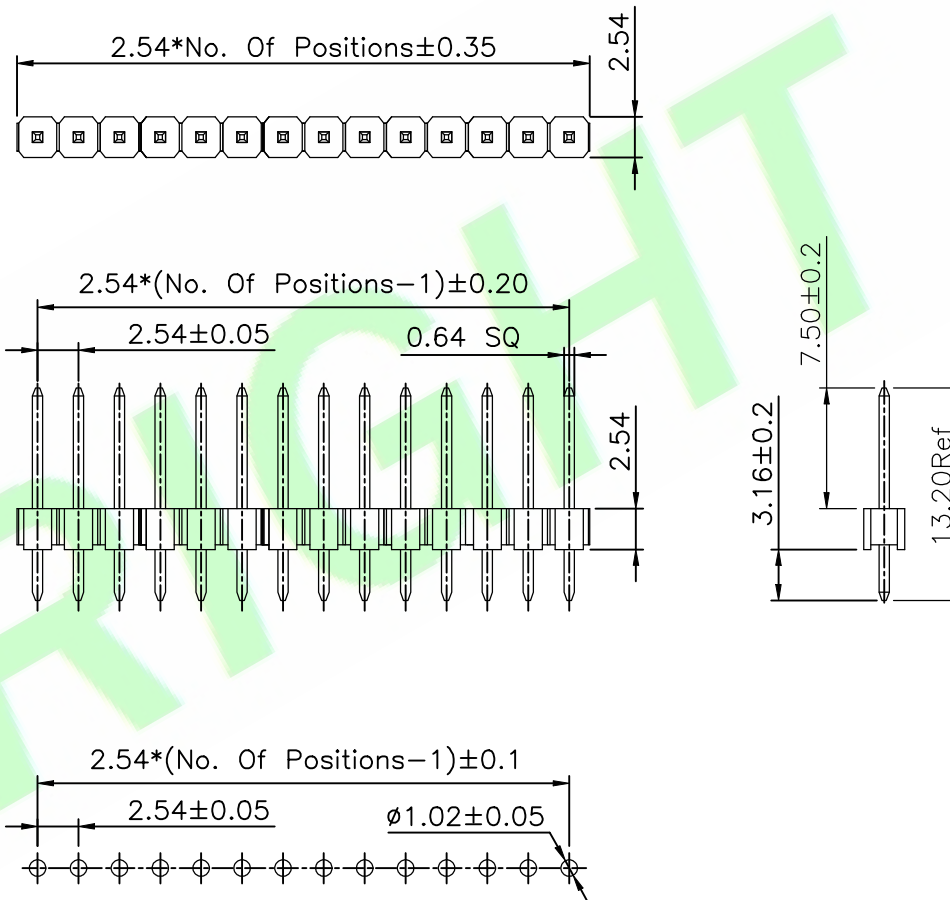

Recommended PCB Layout

				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 25411S-XXX132-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
					LINEAR	ANGLES	DWG. NO.:				
				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 2.54mm Pitch Pin Header Straight Type		SHEET: 1/1		A4
					x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 30-May-2025		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx°: ±1.0°					