

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

25411S-XXXXXX-NX

1 2 3 4 5

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — A: Gold Flash

D: Gold 10u"

H: Selective Gold Plated




Q: Tin Plated

S: Matte Tin Plated


5: — A: In bag

B: In Tube

C: In Tray

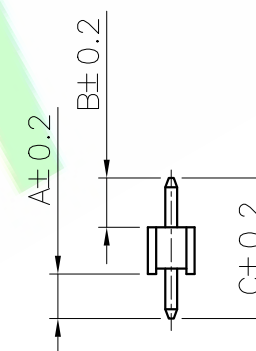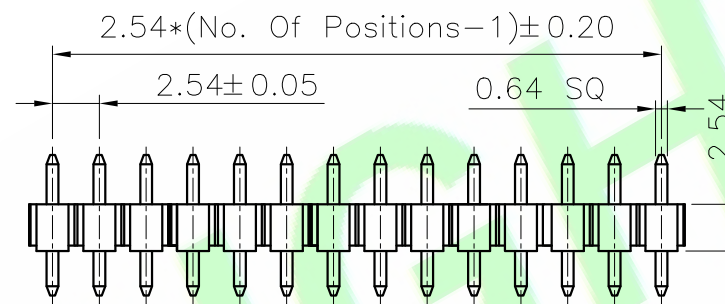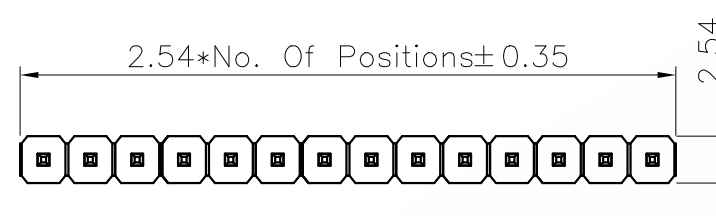

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 25411S-XXXXXX-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.: RD0808-021		
3X				CHKD.:	X.: ±0.30	X': ±5.0'	TITLE :	SHEET: 1/1	
2X				朱波	X.X: ±0.20	X.X': ±3.0'	2.54mm Pitch Pin Header Straight Type	SCALE: 1:1	
1X	ORIGINAL	joy chen		APPD.:	X.XX: ±0.15	X.XX': ±2.0'	DATE: 19-Aug-2008	UNIT: mm	
REV	DESCRIPTION	DR.BY	ECN. NO		X.XXX: ±0.10	X.XXX': ±1.0'			A4