

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

25412M-XXX140-NX
1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Flash
Q:Tin Plated
S:Matte Tin Plated
5: — 0:W/O Peg
1:W/Peg
6: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap in Tape&Reel

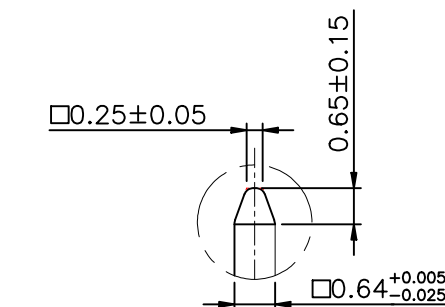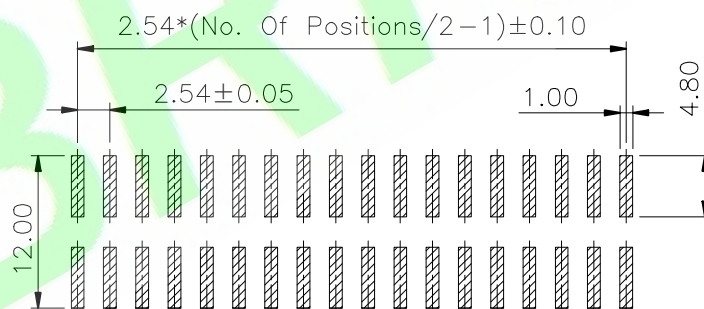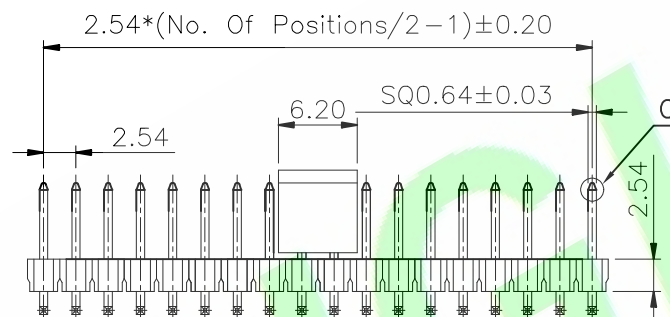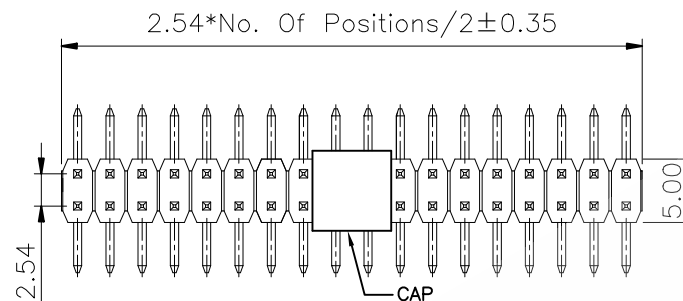

Recommended PCB Layout(Tolerance:0.05mm)

				DR.BY.: Judyyan		GENERAL TOLERANCE:		PART NO : 25412M-XXX140-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
				CHKD.: Hu. ch		LINEAR	ANGLES	DWG. NO.:									
1X				ORIGINAL		Judyyan				TITLE :		SHEET: 1/1				A4	
REV.				DESCRIPTION		DR.BY		ECN. NO.		APPD.: Billy		SCALE: 1:1					
										x.: ±0.30 x.x: ±0.20 x.xx: ±0.15 x.xxx: ±0.10		x': ±5.0° x.x': ±3.0° x.xx': ±2.0° x.xxx': ±1.0°					
1				2		3		4		5		6		7		8	