

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Black

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Operating Temperature Range:-40°~+105°C

Electrical:

Insulator resistance:5000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

25432R-XXX148-PX
1 2 3 4 5 6

1: — Series No.

2: — R/R/A Type

3: — No. of Positions

4: — A:Gold flash

H:Gold flash on contact:Matte Tin on tail

Q:Tin Plated




S:Matte Tin Plated

A1:Gold flash on contact:Tin on tail

5: — P:PBT

6: — B:In Tube

C:In Tray

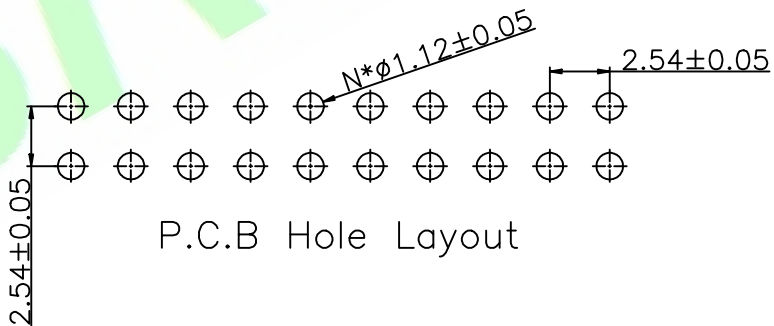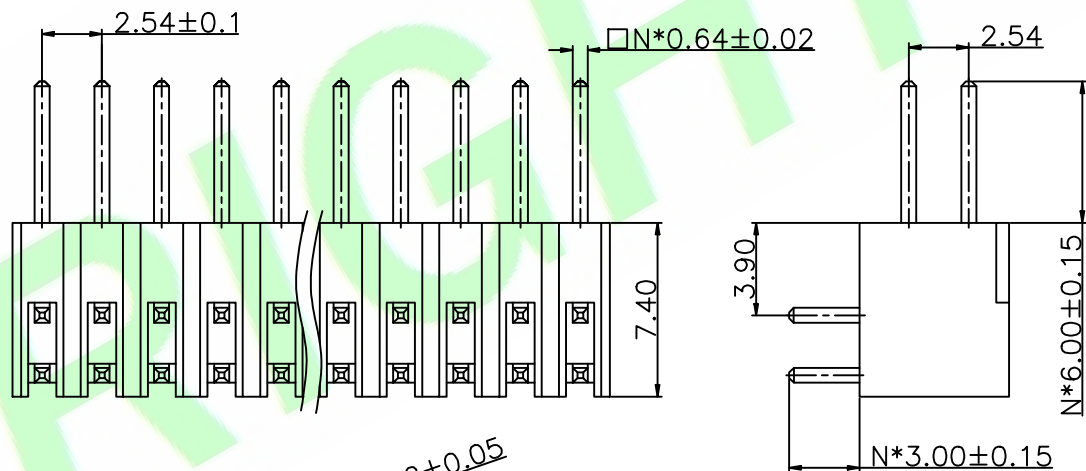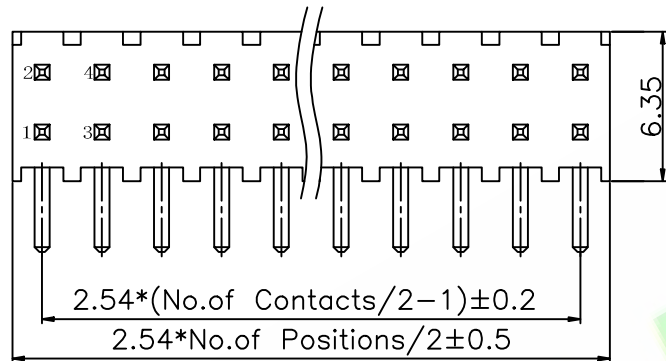


P.C.B Hole Layout

DR.BY.: Bin	GENERAL TOLERANCE:		PART NO : 25432R-XXX148-PX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	X.: ± 0.30	X': $\pm 5.0^\circ$	TITLE : 2.54mm Pitch Pin Header R/A Type	
	X.X: ± 0.20	X.X': $\pm 3.0^\circ$		
APPD.: Billy	X.XX: ± 0.15	X.XX': $\pm 2.0^\circ$	DATE: 10-Sep-2024	
	X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.