

RoHS Compliant

Specifications:

Material And Finish:

Insulator: Polyamide UL94V-0, Color: Green

Contact: Copper Alloy

Wire range: 12~26AWG

Plated: See Ordering Information

Rating:

Current Rating: 16 Amps



Voltage Rating: 300V AC

Operating Temperature Range: -40°~+105°C



Electrical:

Contact resistance: 20m Ohm Max

Withstanding Voltage: 2500V AC/Minute

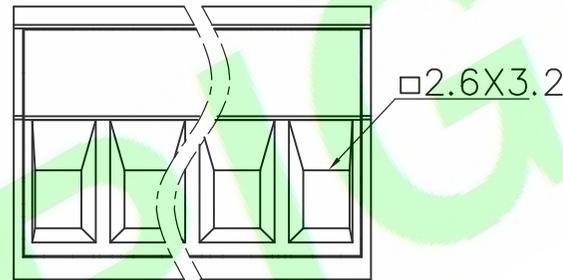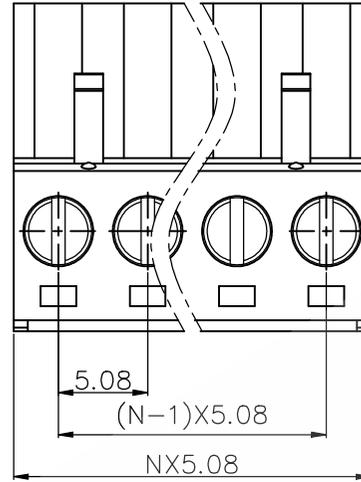

N=Number of contacts

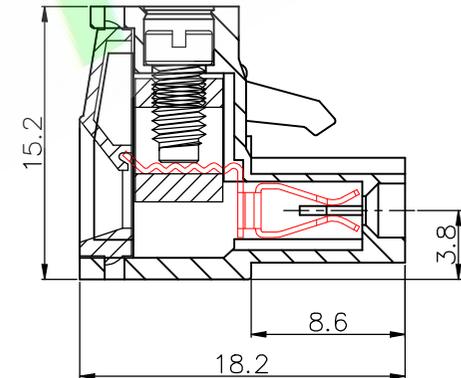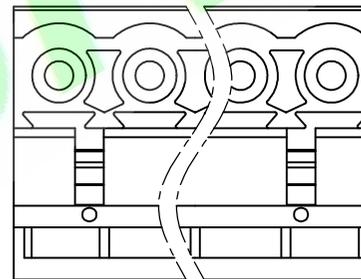

Ordering Information


25W508D1SF-XXX-01-X
 1 23 4 5 6

- 1: — Series No.
- 2: — S: Straight Type
- 3: — F: Female
- 4: — No. of Positions
- 5: — Q: Tin Plated
- 6: — A: In Bag
 B: In Tube
 C: In Tray

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 25W508D1SF-XXX-01-X
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	>30 ±0.30	x: ±5.0°	TITLE : 5.08mm Pitch Straight Type Female Terminal Block
	6~30 ±0.20	x.x: ±3.0°	DATE: 2-Mar-2024
	0~6 ±0.10	x.xx: ±2.0°	
		x.xxx: ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.