

RoHS Compliant



Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating: 5.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

35011S-06S219-NX

1 2 3 4 5

- 1: — Series No.
2: — S: Straight
3: — No. of Positions
4: — S: Matte Tin Plated
5: — A: In bag
B: In Tube
C: In Tray
G: Tape & Reel

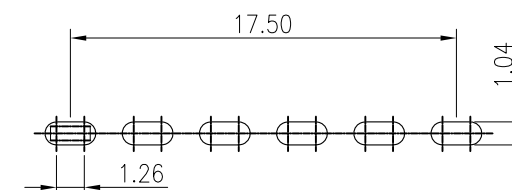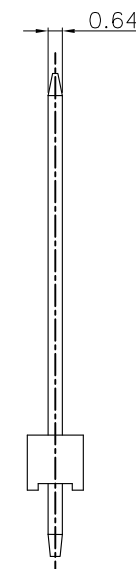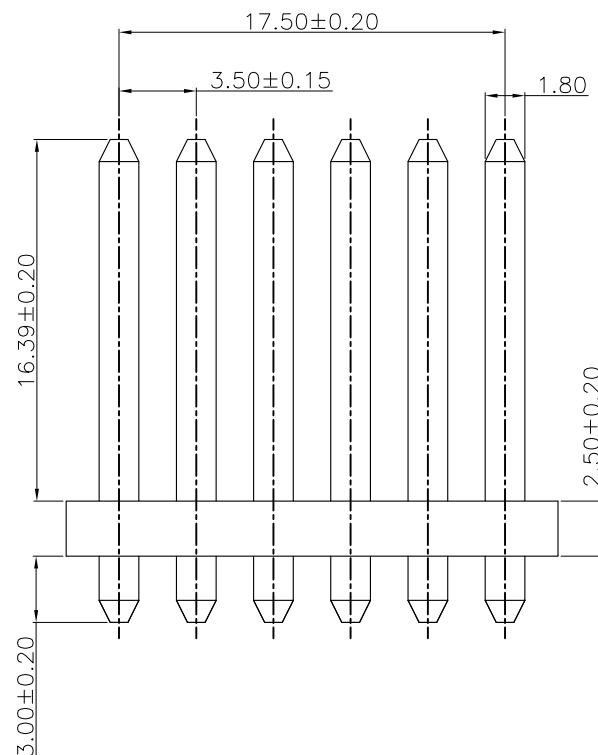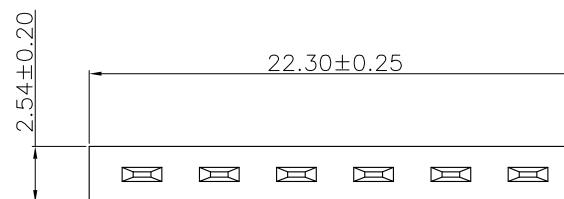

Recommended PCB Layout
(Tolerance:0.05mm)

5X				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : 35011S-06S219-NX	HJBRIGHT® 东莞市華晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0'	TITLE : 3.50mm Pitch Pin Header Straight DIP Type	SHEET: 1/1			A4
2X					x.x: ±0.20	x.x': ±3.0'		SCALE: 1:1			
1X	First edition	Aren		APPD.:	x.xx: ±0.15	x.xx': ±2.0'		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0'	DATE: 21-NOV-2022	THIRD ANGLE PROJECTION			