

RoHS Compliant



Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass H65

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

USCAR conform

Ordering Information

35011S-XXS188-NX

1 2 3 4 5

1:— Series No.

2:— S:Straight Type

3:— No. of Positions



4:— S:2.5um Min matte tin over 1.25um nickel

5:— A:In bag

B:In Tube

C:In Tray

G:Tape&Reel

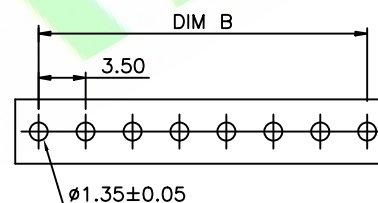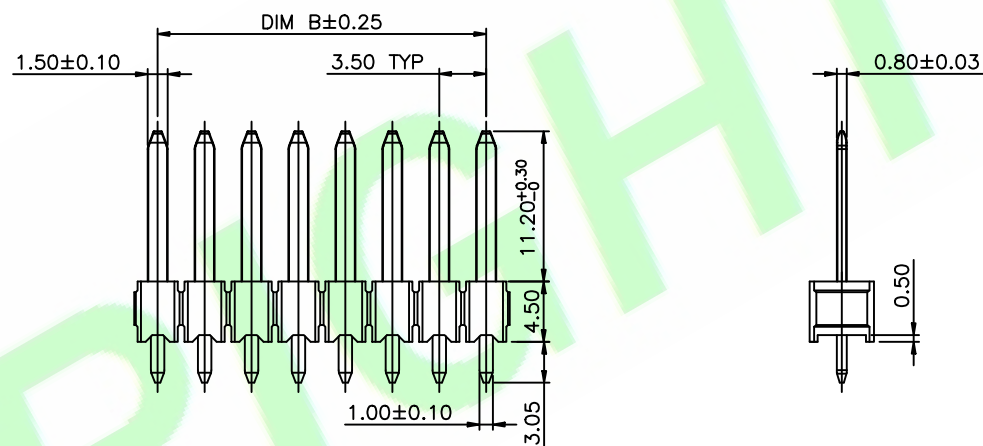

RECOMMENDED P.C.B LAYOUT

TOLERANCE:±0.05MM

CKT SIZE	DIM A	DIM B
1X2	7.00	3.50
1X3	10.5	7.00
1X4	14.00	10.50
1X5	17.50	14.00
1X6	21.00	17.50
1X7	24.50	21.00
1X8	28.00	24.50
1X9	31.50	28.00
1X10	35.00	31.50

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:	PART NO : 35011S-XXS188-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	DWG. NO.:		
3X				CHKD.: Tony	ANGLES	TITLE : 3.5X6.0mm Pitch Pin Header Straight type	SHEET: 1/1	
2X					X.: ±	X': ±5.0°	SCALE: 1:1	
1X	ORIGINAL	Judyyan		APPD.: Billy	X.X: ±0.50	X.X': ±3.0°	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.25	X.XX': ±2.0°		A4
					X.XXX: ±0.10	X.XXX': ±1.0°		