

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information



35012R-12S212A-X
1 2 3 4 5

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— S:Matte Tin Plated
5:— B:In Tube
C:In Tray

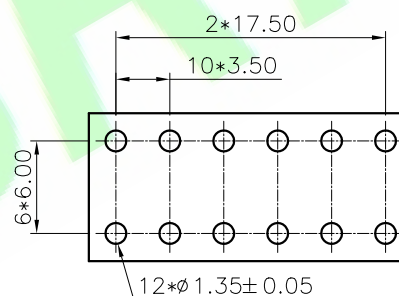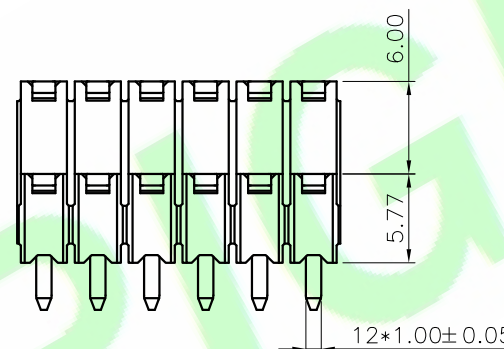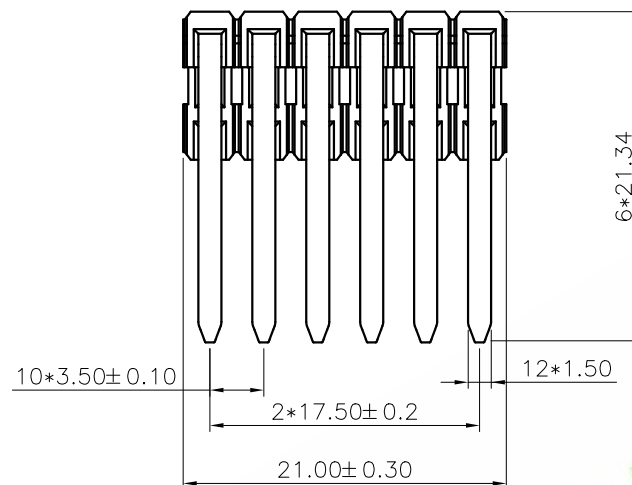

推荐的PCB板布局

公差:±0.05MM

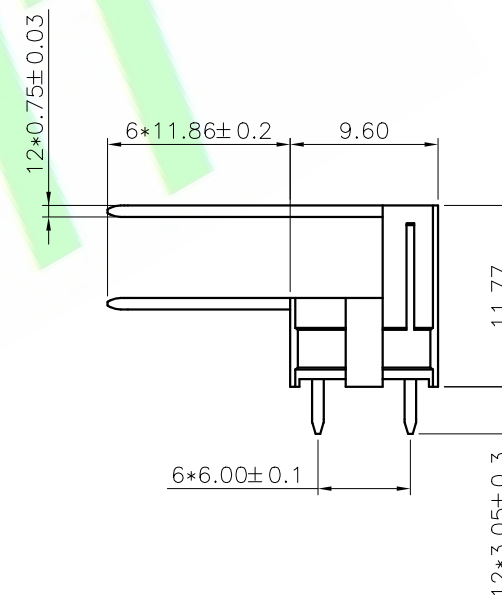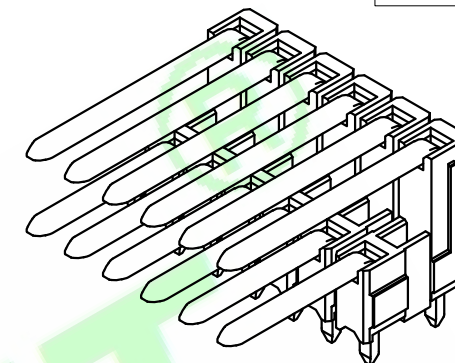DR.BY.:
JoinZm

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : 35012R-12S212A-X

DWG. NO.:

TITLE :
3.5X6.0mm Pitch Pin Header
R/A type

HJBRIGHT® 东莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV	DESCRIPTION	DR.BY	ECN. NO