






Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— S:Matte Tin Plated
5:— B:In Tray
C:In Tray

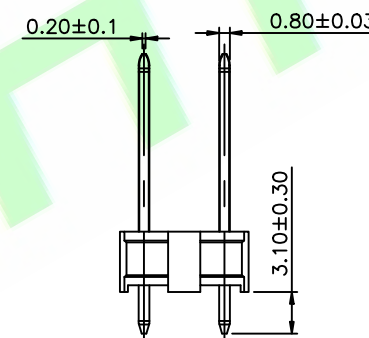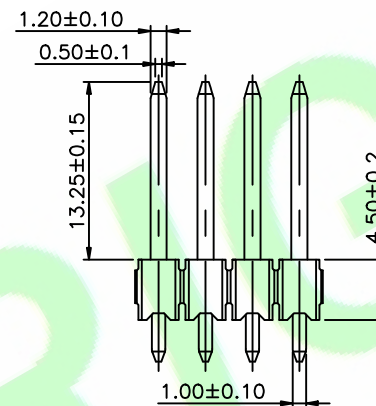

RECOMMENDED P.C.B LAYOUT

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : 35012S-08S209-CX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES				
3X				CHKD.: kang	x: ±	x': ±5.0°	TITLE : 3.5X6.0mm Pitch Pin Header Straight type			
2X					x.x: ±0.50	x.x': ±3.0°				
1X	ORIGINAL	kang		APPD.:	x.xx: ±0.25	x.xx': ±2.0°	DATE: 09-Sep-2023	SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°		SCALE: 1:1		
							UNIT: mm	THIRD ANGLE PROJECTION		