

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 46 30% G/F UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:Q=100U" MIN. TIN OVER 50U" NICKEL.

Y=30U" MIN. SECTEct GOLD IN CONTACT

AREA. 100U" MIN. SELECT TIN ON

SOLDER TAILS OVER 50U" MIN. NICKEL

H=SECTEct Gold Flash IN CONTACT

AREA. 100U" MIN. SELECT TIN ON

SOLDER TAILS OVER 50U" MIN. NICKEL

Rating:

Current Rating:50 Amp

Voltage Rating:600V DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

A10001S-XXX-13-B-G

1 2 3 4 5

1: — Series No.

2: — S: Straight Type






3: — No. of Positions

4: — H: Selective Gold Flash Plated





Y: Selective 30u" Gold Plated

Q: Tin Plated

5: — B: In Tube

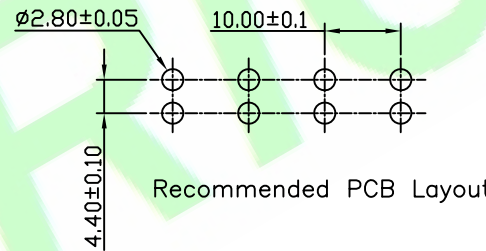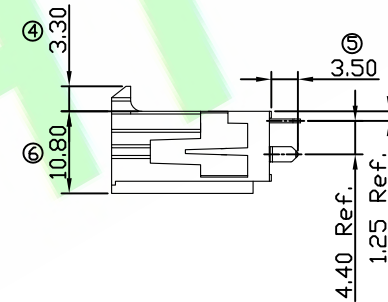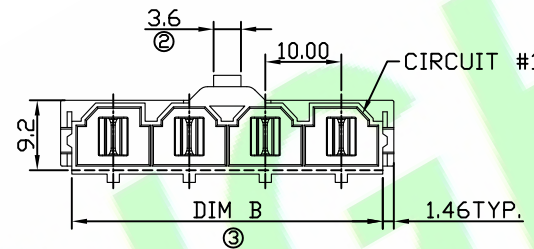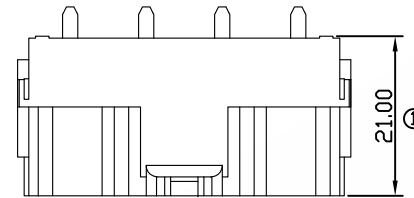

Circuit	DIM B
02	20.90
03	30.90
04	40.90
05	50.90
06	60.90

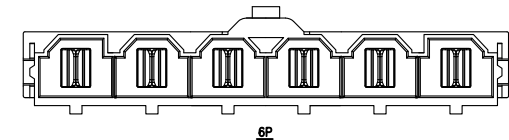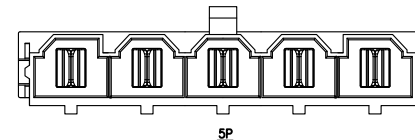

5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	Samson	
CHKD.:	Tony	
APPD.:	Billy	

GENERAL TOLERANCE:		PART NO : A10001S-XXX-13-B-G
LINEAR	ANGLES	DWG. NO.:
X.: ±0.40	X':	TITLE : VERTICAL HEADER ASSEMBLY
X.X: ±0.25	X.XX':	MINIFIT SR.SERIES (No positioning fork)
X.XXX:	X.XXX':	DATE: 17-May-2013

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4