

Specifications:

Material And Finish:

Insulator: LCP UL94V-0 Color: Black

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 1.5 Amp

Voltage Rating: 50V AC/DC

Operating Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information

A1200H-XXX-01-X

1 2 3 4 5

- 1: — Series No.
 2: — H: Horizontal SMT Type
 3: — No. of Positions
 4: — A: Gold Flash
 S: Matte Tin Plated
 5: — B: In Tube
 D: In Tape & Reel

Circuits	DIM A	DIM B	DIM C	DIM D
02		1.20	2.60	4.20
03	1.20	2.40	3.80	5.40
04	2.40	3.60	5.00	6.60
05	3.60	4.80	6.20	7.80

5X					DR.BY:	Samson		
4X								
3X					CHKD.:	Tony		
2X								
1X	ORIGINAL		Samson		APPD.:	Billy		
REV.	DESCRIPTION		DR.BY	ECN. NO.				

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.25	X: ±REF6°
X.X: ±0.20	X.XX: ±3.0°
X.XXX: ±0.10	X.XXX: ±2.0°

PART NO : A1200H-XXX-01-X

DWG. NO.:

TITLE :

1.20PH BTW H1.45
RECEPTACLE


DATE: 5-Jan-2017

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1




SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

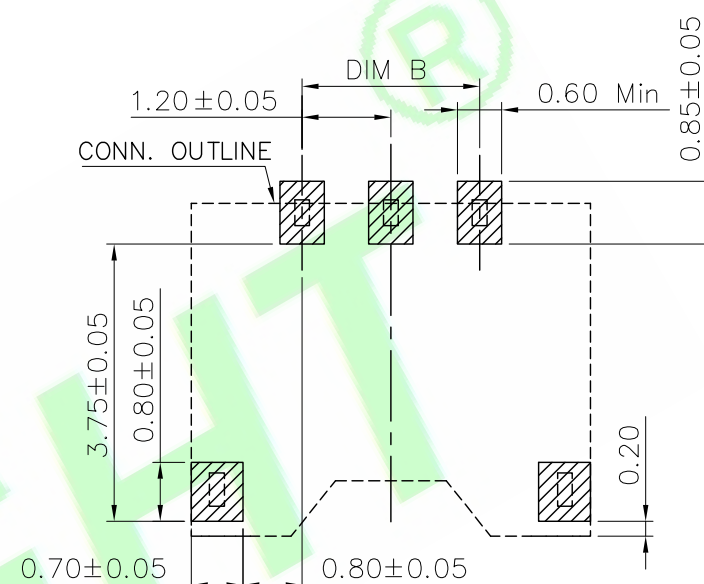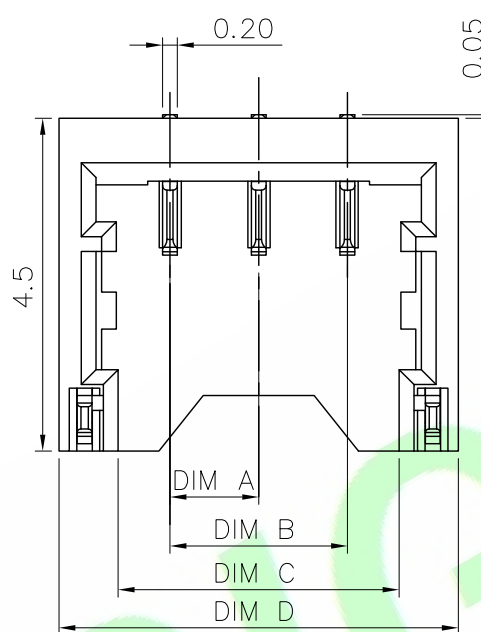

RECOMMENED PCB LAYOUT
 GENERAL TOLERANCE ± 0.05

