

Specifications:

Material And Finish:

Insulator:Nylon6T/LCP UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:125V AC/DC





Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:250V AC/Minute

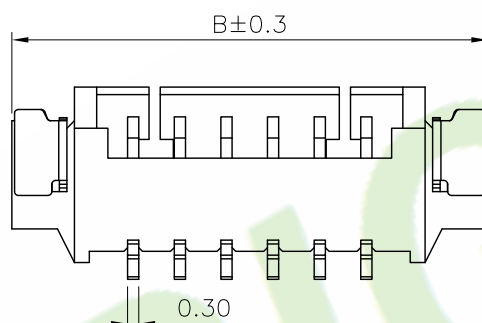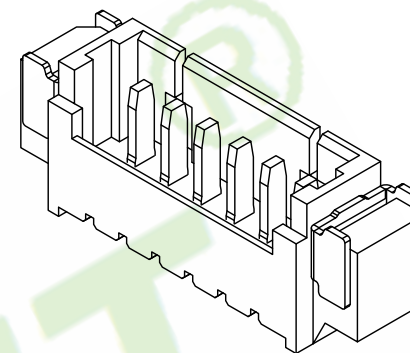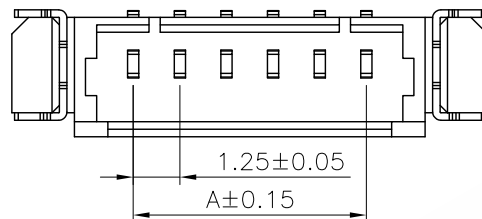


Ordering Information

A1250H-XXX-01-XD

1 2 3 4 5 6

- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — C:LCP
N:PA6T
6: — D:In Tape&Reel

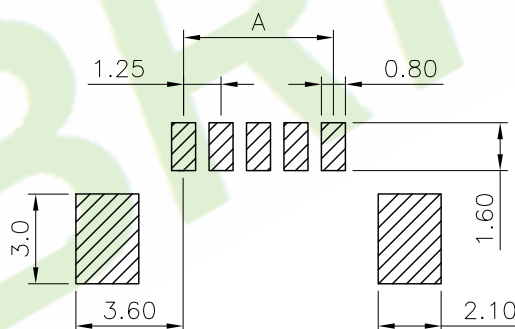


Recommended PCB Layout

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	1.25	7.75	9	10.00	16.50
3	2.50	9.00	10	11.25	17.75
4	3.75	10.25	11	12.50	19.00
5	5.00	11.50	12	13.75	20.25
6	6.25	12.75	13	15.00	21.50
7	7.50	14.00	14	16.25	22.75
8	8.75	15.25	15	17.50	24.00

5X			
4X			
3X			
2X	Update code options	Judyyan	20220815
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	GENERAL TOLERANCE:	
Samson	LINEAR	ANGLES
CHKD.:	X.: ±0.30	X': ±5.0°
Tony	X.X: ±0.20	X.X': ±3.0°
APPD.:	X.XX: ±0.15	X.XX': ±2.0°
Billy	X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A1250H-XXX-01-XD
DWG. NO.:
TITLE :
1.25mm Pitch Wafer Horizontal SMT Type
DATE: 24-Sep-2014

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		