

Specifications:**Material And Finish:**

Insulator:Nylon66/PA6T/LCP UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:100M ohm min.

Withstanding Voltage:250V AC/Minute

Ordering Information**A1250R-XXX-01-XX**

1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — C:LCP
L:PA66
N:PA6T
6: — A:In Bag
B:In Tube
C:In Tray

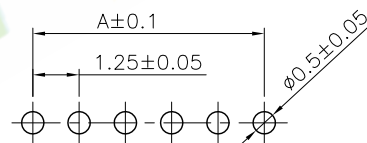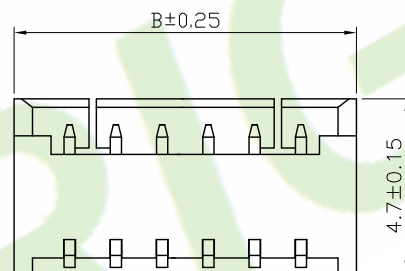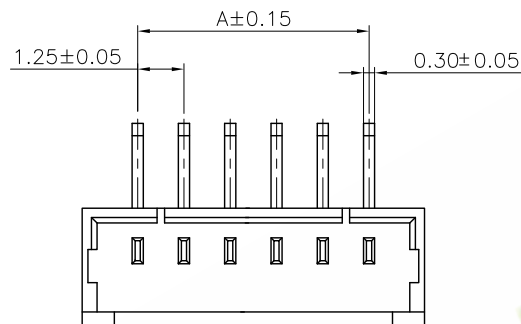

Recommended PCB Layout

Circuits	Dimensions	
	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A1250R-XXX-01-XX

DWG. NO.: RD0806-019

TITLE :

1.25mm Pitch Wafer R/A Type

DATE: 02-Jun-2008

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4