

RoHS Compliant

Specifications:

Material And Finish:

Insulator:UL94V-0

Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:125V

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

A1250R-XXX-02-XX

1 2 3 4 5 6

1: ——— Series No.

2: ——— R:R/A Type

3: ——— No. of Positions

4: ——— A:Gold flash

Q:Tin Plated

A1:Gold flash on contact;Tin on tail

D:10u" Gold on contact;T;Gold flash on tail

K:15u" Gold on contact;T;Gold flash on tail

5: ——— A:PA46

G:PA9T





N:PA6T

L:PA66

6: ——— A:In bag

B:In Tube

D:InTape&Reel

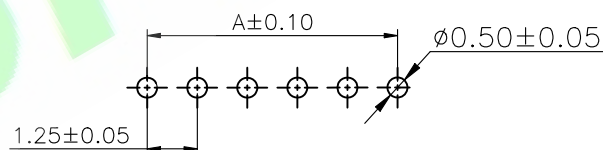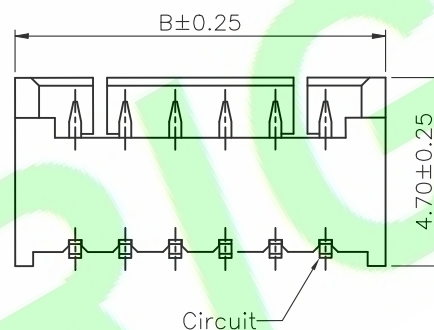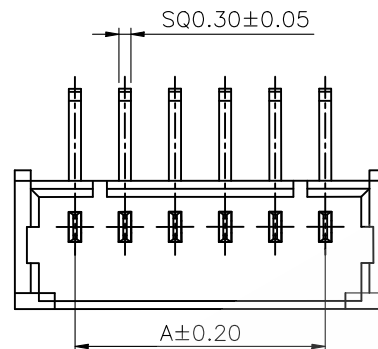

Recommended PCB Layout


Circuits	Dimension mm	
	A	B
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75
17	20.00	23.00
18	21.25	24.25

2X	Drawing optimization	xiao	2026/06/20
1X	ORIGINAL	Samson	
REV	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1250R-XXX-02-XX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X°: ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X°: ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX°: ±2.0°	TITLE : 1.25mm Pitch Wafer R/A Type
	X.XXX: ±0.10	X.XXX°: ±1.0°	
			DATE: 02-Jun-2008

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4