

Specifications:

Material And Finish:

Insulator:Nylon6T/LCP UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:250V AC/Minute

Ordering Information

A1250S-XXX-XX-XX

1 2 3 4 5 6

1:— Series No.

2:— S: Straight Type

3:— No. of Positions

4:— A: Gold Flash

H: Selective Gold Plated

S: Matte Tin

Q: Tin Plated

5:— DIP size

01: C=2.30mm

02: C=1.70mm



5:— C: LCP

N: PA6T

6:— A: In Bag

B: In Tube

C: In Tray

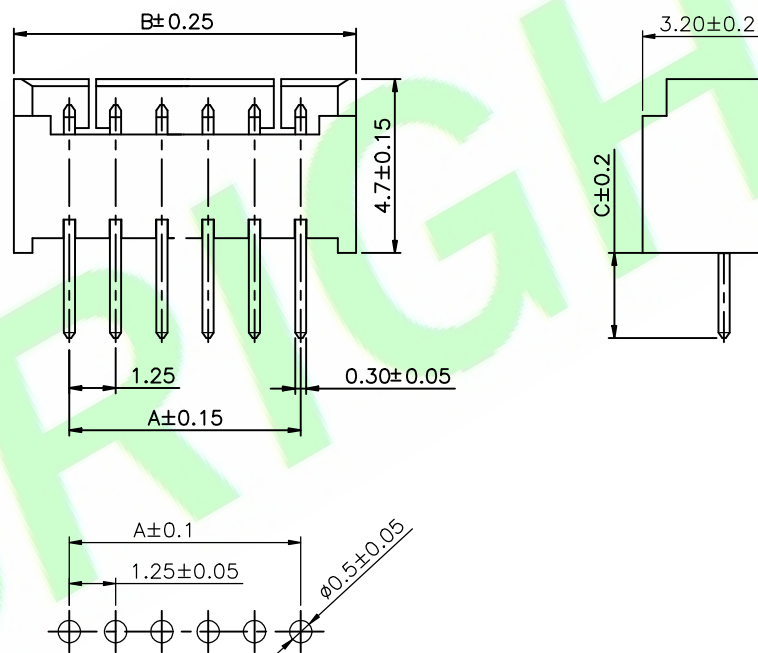

Recommended PCB Layout

Circuits	Dimensions	
	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1250S-XXX-XX-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X					LINEAR ANGLES		DWG. NO.: RD0806-018						
3X	Adding code options	Judyyan	20240413	CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.25mm Pitch Wafer Straight Type	SHEET: 1/1					A4
2X	Update DWG	Samson	20151008		x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1					
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 02-Jun-2008	UNIT: mm	THIRD ANGLE PROJECTION				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°							