

Specifications:**Material And Finish:**

Insulator: Nylon 66 UL94V-0 Color: Natural

Contact: Brass

Plated: See Ordering Information

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 150V AC/DC



Operating Temperature Range: -40~+105°C

Electrical:

Contact resistance: 30m Ohm Max



Insulator resistance: 500M ohm min.

Withstanding Voltage: 500V AC/Minute

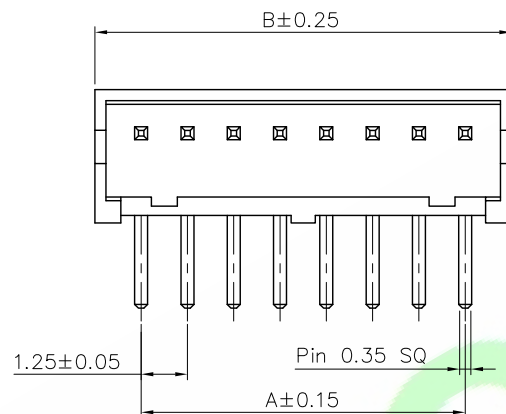**Ordering Information****A1252R-XXX-01-X**

1 2 3 4 5

- 1: — Series No.
2: — R: R/A Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In Bag
B: In Tube
C: In Tray
D: In Tape & Reel

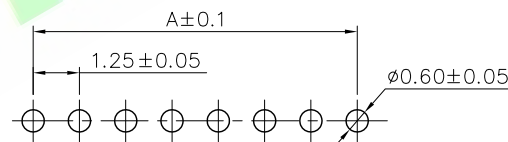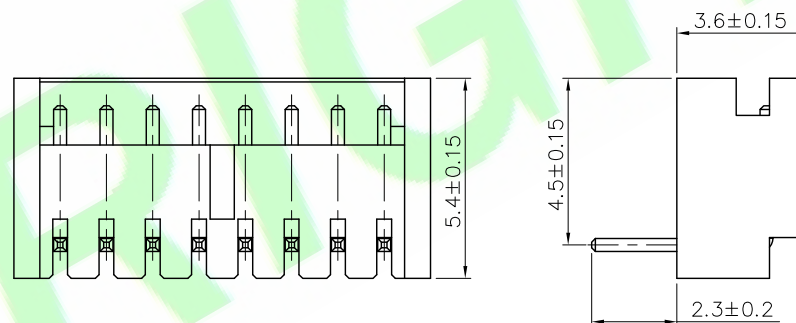

Recommended PCB Layout

Circuits	Dimensions	
	A	B
02	1.25	3.75
03	2.50	5.00
04	3.75	6.25
05	5.00	7.50
06	6.25	8.75
07	7.50	10.00
08	8.75	11.25
09	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A1252R-XXX-01-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0806-022							
3X				CHKD.:	x.: ±0.30	x*: ±5.0°	TITLE : 1.25mm Pitch Wafer R/A Type		SHEET: 1/1			A4		
2X				Tony	x.x: ±0.20	x.x*: ±3.0°			SCALE: 1:1					
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx*: ±2.0°	DATE: 02-Jun-2008		UNIT: mm				THIRD ANGLE PROJECTION	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx*: ±1.0°								