

Specifications:**Material And Finish:**

Insulator: Nylon 66 UL94V-0

Pantone Color: Natural

Contact: Brass

Plated: See Ordering Information

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 150V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 30m Ohm Max




Insulator resistance: 500M ohm min.

Withstanding Voltage: 500V AC/Minute


Ordering Information**A1252S-XXQ-01-X**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — Q: Tin Plated
5: — A: In Bag
B: In Tube
C: In Tray
D: In Tape & Reel

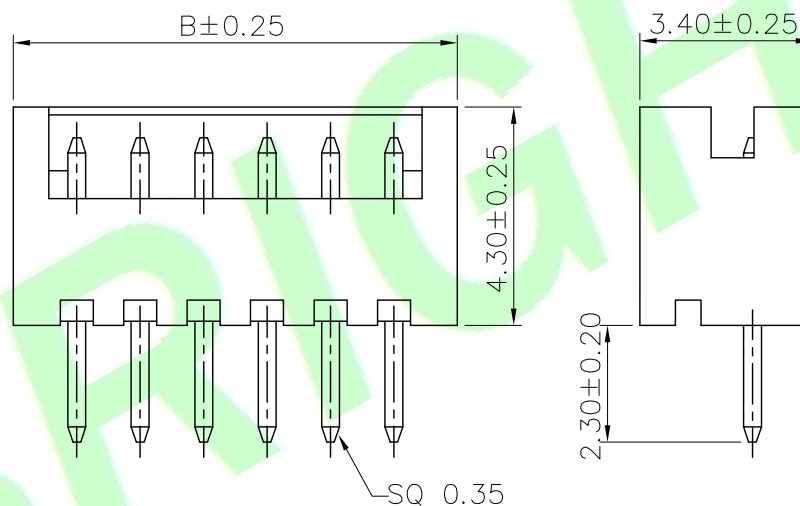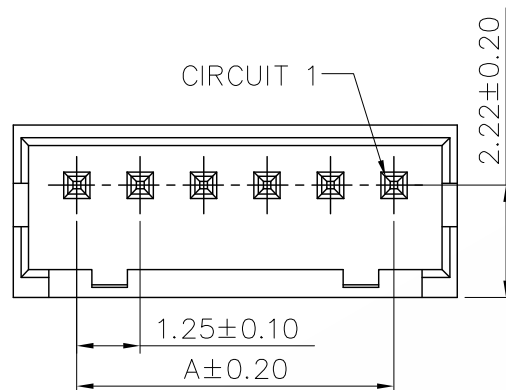

PCB LAYOUT



Circuits	Dimensions	
	A	B
02	1.25	3.75
03	2.50	5.00
04	3.75	6.25
05	5.00	7.50
06	6.25	8.75
07	7.50	10.00
08	8.75	11.25
09	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

5X			
4X			
3X			
2X	Update code options	Judyyan	20220818
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY:	Bruce
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	X': ±
X.X: ±0.25	X.X': ±
X.XX: ±0.15	X.XX': ±
X.XXX: ±0.05	X.XXX': ±

PART NO : A1252S-XXQ-01-X
DWG. NO.: RD0806-021
TITLE : 1.25mm Pitch Wafer Straight Type
DATE: 02-Jun-2008

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4