

Specifications:

Material And Finish:

Insulator:PA6T/LCP UL94V-0,Color:Natural

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:200V AC/DC

Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:100M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

A1255H-XXX-01-X

1 2 3 4 5

- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flash
S:Matte Tin Plated
5: — D:In Tape&Reel

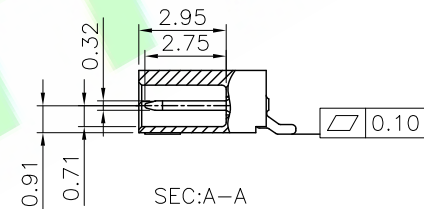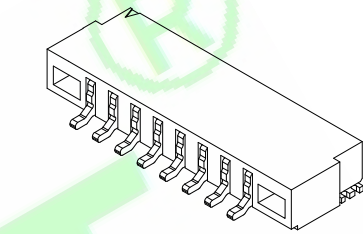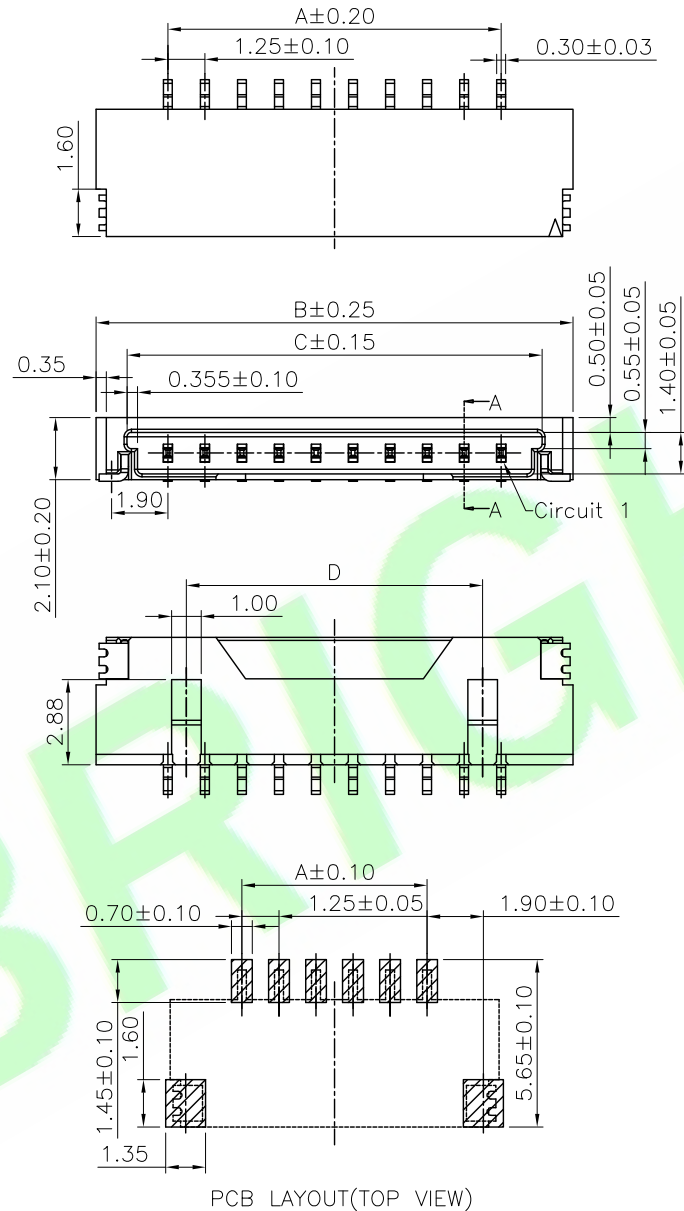


Circuits	Dimensions			
	A	B	C	D
10	11.25	16.10	14.01	10.00
11	12.50	17.35	15.26	11.25
12	13.75	18.60	16.51	12.50
13	15.00	19.85	17.76	13.75
14	16.25	21.10	19.01	15.00
15	17.50	22.35	20.26	16.25
20	23.75	28.60	26.51	22.50
25	30.00	34.85	32.76	28.75
30	36.25	41.10	39.01	35.00

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A1255H-XXX-01-X	
4X				Samson	LINEAR		DWG. NO.:	
3X				CHKD.:	ANGLES		TITLE :	
2X	ORIGINAL			Tony	X.: ±0.30	X': ±5.0°	1.25mm Pitch Wafer Horizontal SMT Type	
1X	ORIGINAL	Samson		APPD.:	X.X: ±0.20	X.X': ±3.0°	DATE: 24-Sep-2018	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XX: ±0.15	X.XX': ±2.0°		
					X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4