

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA9T/LCP UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10-30P (2A) /32-40P (1.5A) AC/DC

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

A15005M-XXX-XX-XX

1 2 3 4 5 6 7

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated

Q:Tin Plated

V:3u" Gold on contact;Tin on tail

M:15u" Gold on contact;Tin on tail

A2:15u" Gold on contact;Tin on tail

5:— Color:

NA:Natural

BK:Black

MG:Moss green

DK:Dark pink

BL:Blue

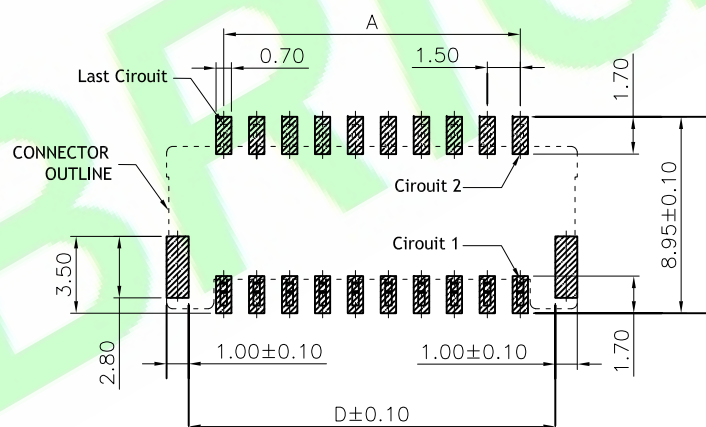
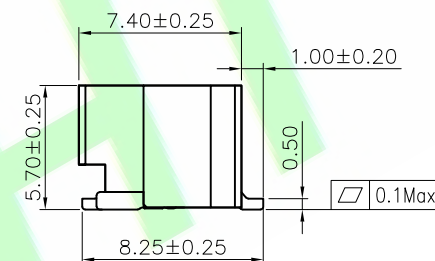
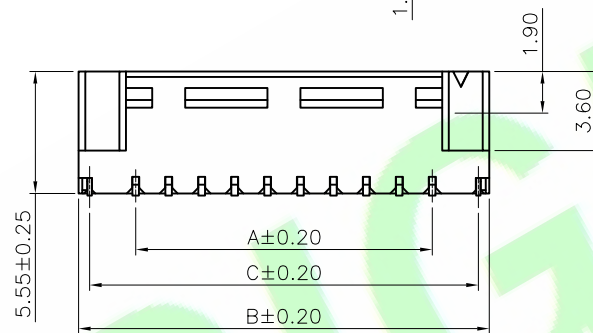
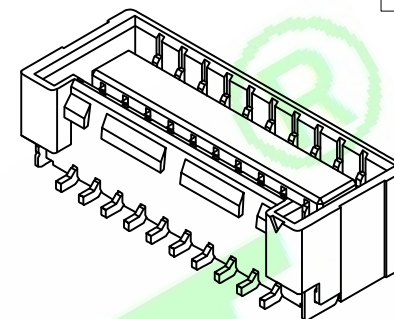
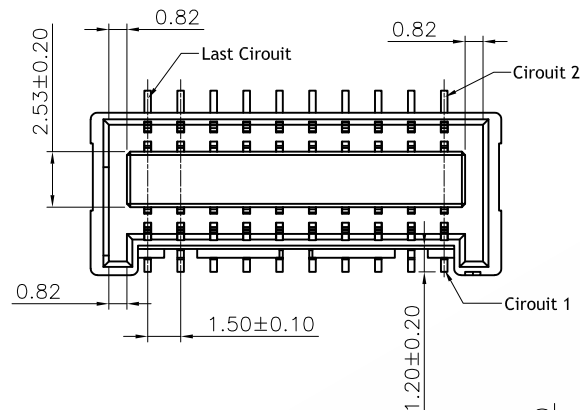
TR:Tomato red

6:— C:LCP

G:PA9T

7:— B:In Tube

D:In Tape&Reel

P.C.B LAYOUT
TOLERANCE:±0.05

Poles	Dimensions (mm)			
	A	B	C	D
10P	6.00	11.20	10.20	9.20
12P	7.50	12.70	11.70	10.70
14P	9.00	14.20	13.20	12.20
16P	10.50	15.70	14.70	13.70
18P	12.00	17.20	16.20	15.20
20P	13.50	18.70	17.70	16.70
22P	15.00	20.20	19.20	18.20
24P	16.50	21.70	20.70	19.70
26P	18.00	23.20	22.20	21.20
28P	19.50	24.70	23.70	22.70
30P	21.00	26.20	25.20	24.20
32P	22.50	27.70	26.70	25.70
34P	24.00	29.20	28.20	27.20
36P	25.50	30.70	29.70	28.70
38P	27.00	32.20	31.20	30.20
40P	28.50	33.70	32.70	31.70

5X			
4X			
3X			
2X	Update code options	Judyyan	20220820
1X	ORIGINAL	Ken	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Ken
CHKD:	Mark
APPD:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A15005M-XXX-XX-XX
DWG. NO.:
TITLE : 1.50mm Pitch Vertical Dual Row Wafer -Smd Type
DATE: 16-Jun-2019

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4