

Specifications:

Material And Finish:

Insulator:LCP/PA6T UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:50V AC/DC





Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

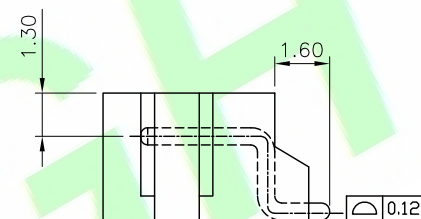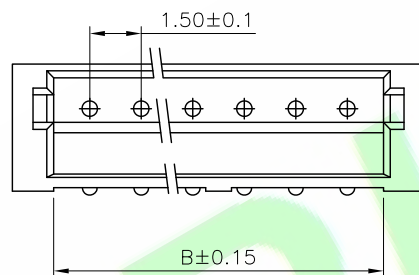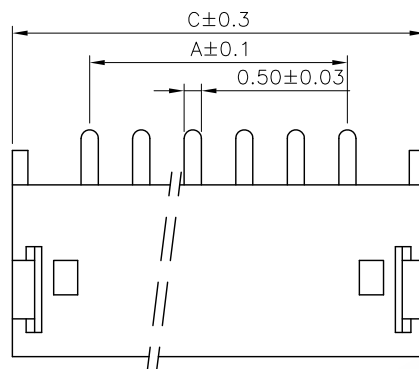

Ordering Information

A1500H-XXX-01-X

1 2 3 4 5

1:—Series No.

2:—H:Horizontal SMT Type

3:—No. of Positions

4:—A:Gold Flash

H:Selective Gold Plated


Q:Tin Plated

5:—A:In bag

B:In Tube

C:In Tray

D:In Tape&Reel

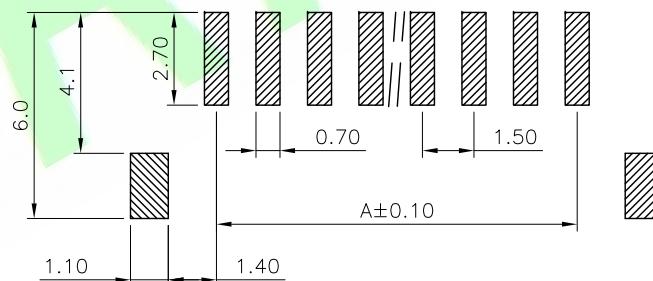

Recommended PCB Layout


Circuits	Dimensions		
	A	B	C
02	1.50	3.60	6.00
03	3.00	5.10	7.50
04	4.50	6.60	9.00
05	6.00	8.10	10.50
06	7.50	9.60	12.00
07	9.00	11.10	13.50
08	10.50	12.60	15.00
09	12.00	14.10	16.50
10	13.50	15.60	18.00
11	15.00	17.10	19.50
12	16.50	18.60	21.00
13	18.00	20.10	22.50

5X			
4X			
3X			
2X	依实物更新图面及尺寸	Tsw	20220119
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A1500H-XXX-01-X	
DWG. NO.: RD0806-029	
TITLE :	
1.50mm Pitch Wafer Horizontal SMT Type	
DATE: 02-Jun-2008	

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		