

Specifications:

Material And Finish:

Insulator:PA9T/LCP UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:2.0A AC/DC(24AWG)

Voltage Rating:50V AC/DC




Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

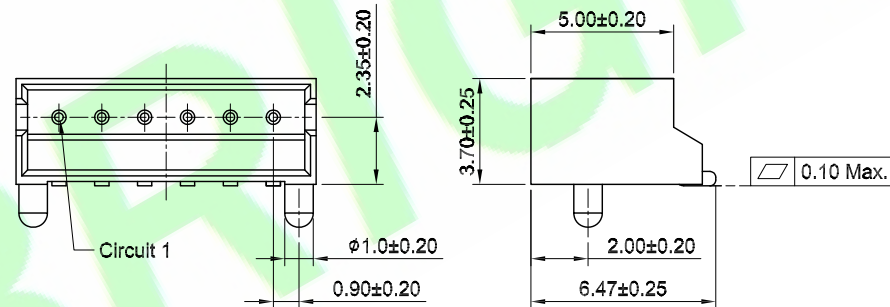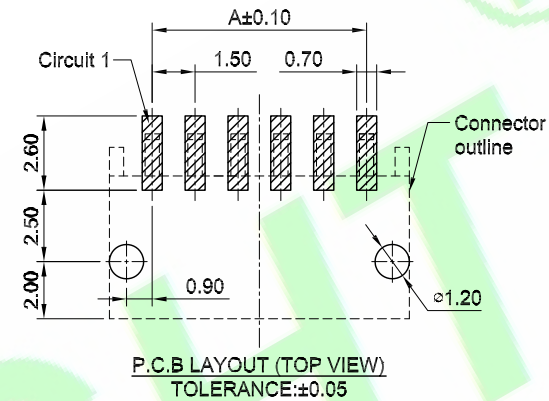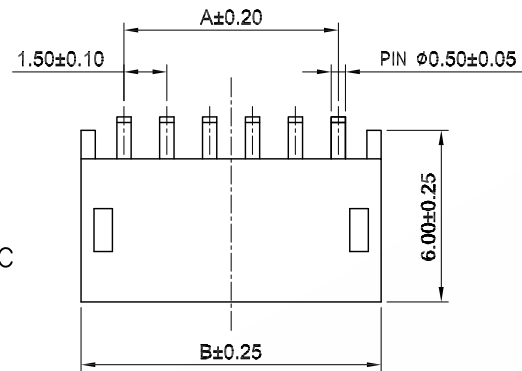

Ordering Information

A1500H-XXX-02-X
1 2 3 4 5

- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — A:In bag
B:In Tube
C:In Tray
D:In Tape&Reel


Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
2P	1.50	4.50
3P	3.00	6.00
4P	4.50	7.50
5P	6.00	9.00
6P	7.50	10.50
7P	9.00	12.00
8P	10.50	13.50
9P	12.00	15.00
10P	13.50	16.50
11P	15.00	18.00
12P	16.50	19.50
13P	18.00	21.00

5X				DR.BY.: Sophia	GENERAL TOLERANCE:		PART NO : A1500H-XXX-02-X	
4X					LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.: Ren	X.: ±0.30	X': ±5.0°	TITLE :	
2X					X.X: ±0.20	X.X': ±3.0°	1.50mm Pitch Wafer Horizontal SMT Type	
1X	ORIGINAL	Sophia		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 19-May-2021	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4