

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.




Withstanding Voltage:500V AC/Minute

Ordering Information



A1500S-XXX-01-XXA

1 2 3 4 5 6 7

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — DIP size:
A: D=2.80
B: D=3.40
6: — G: Grey
N: Natural
7: — A: In Bag

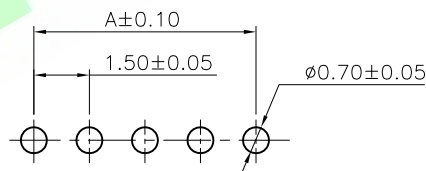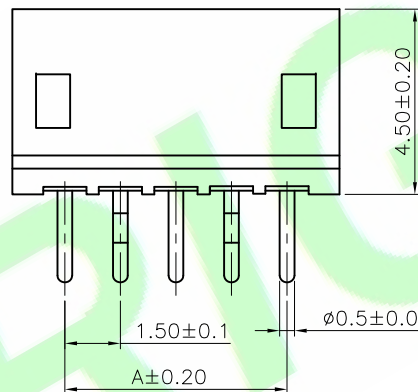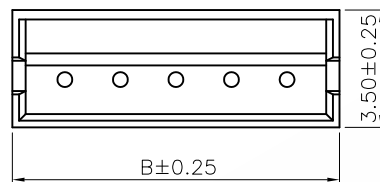

Recommended PCB Layout

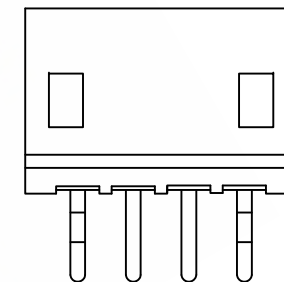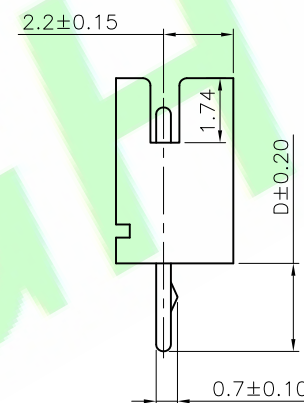

2~4Pin kink

Circuits	Dimensions	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

5X			
4X			
3X			
2X	Update code options	Judyyan	20220906
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A1500S-XXX-01-XXA
DWG. NO.: RD0806-027
TITLE : 1.50mm Pitch Wafer Straight Type
DATE: 02-Jun-2008

HJBRIGHT®

東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4