

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:350V AC/DC




Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute





Ordering Information

A1501H-XXX-01-X

1 2 3 4 5

- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — A:In bag
B:In Tube
C:In Tray
D:In Tape&Reel

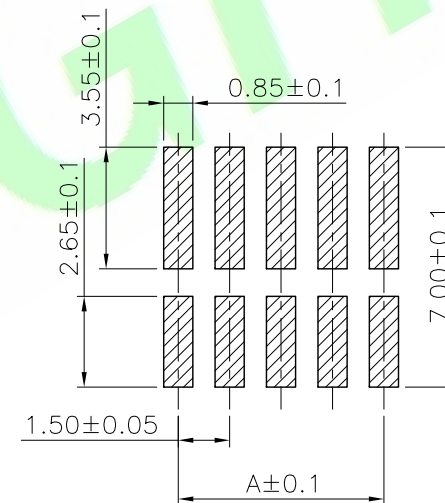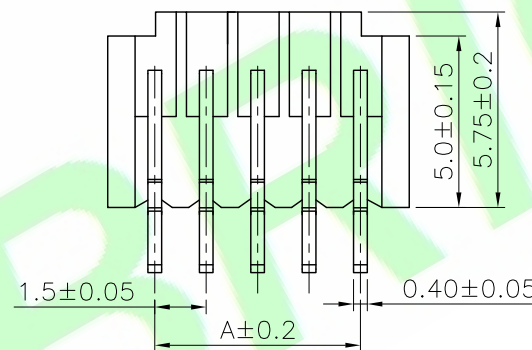

Recommended PCB Layout

Circuits	Dimensions	
	A	B
02	1.50	4.30
03	3.00	5.80
04	4.50	7.30
05	6.00	8.80
06	7.50	10.30
07	9.00	11.80
08	10.50	13.30
09	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1501H-XXX-01-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES	DWG. NO.: RD0806-031			
3X				CHKD.: Tony	x.: ±0.30	x*: ±5.0°	TITLE : 1.50mm Pitch Wafer Horizontal SMT Type		SHEET: 1/1		A4
2X					x.x: ±0.20	x.x*: ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°	DATE: 02-Jun-2008		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10			x.xxx*: ±1.0°		